

BRICK

Architectural Rectangle Glass Casting Sconces

INSTALLATION MANUAL

PRODUCT PARAMETER	
INPUT VOLTAGE	120Vac
CONTROL	Triac dimmable
WORKING TEMP.	-4°F~104°F



SAFETY INFORMATION

BE SURE THE POWER IS OFF! RISK OF ELECTRICAL SHOCK: Always use the switch to power off. Do not perform any operations while this unit is powered on. The electrical system you want to connect the device to must be grounded. Read the instructions before using or powering this device. The safety instructions must remain with the unit in case of transfer. Any damage to the device linked to an inappropriate use is excluded from support by the warranty. Before connecting, make sure that the current and voltage are compatible with this device. We highly recommend that all installations are made by QUALIFIED ELECTRICIAN. We are NOT responsible by any means for the use or misuse of the following information. We are NOT responsible in whole or part for any harm or damage that may or may not be caused. We reserve the right to revise the components of any product, due to part availability or change ETL, CUL, UL standards without assuming any obligation or liability to modify any products previously manufactured and without notice. These instructions do not cover all details of variations in equipment, nor do they provide every possible contingency to be met. Turn off / unplug power when installing or service device.

PRE - INSTALLATION

- Read carefully before installing fixture. Retain for future reference.
- Failure to follow instructions may result in serious injury or death
- Upon receipt the fixture, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier. Compare the catalog description listed on the package slip with the fixture label on the housing to assure you have received material.
- This fixture must be wired in accordance with the international electrical code and applicable local codes and ordinances. Proper grounding is required to insure personal safety. Carefully observe the correct grounding procedure under installation section.


WALL INSTALLATION (Caution: Before beginning installation turn off the circuit breaker and light switch)

STEP 1




Inspect the packaging.

STEP 2




Open the package & check included accessories.

STEP 3




Unfasten the glass lens from LED engine to open fixture

STEP 4

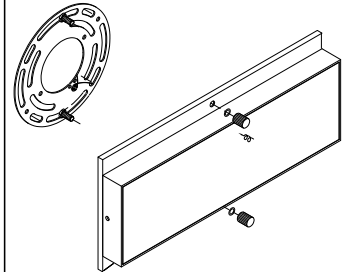


Remove the two screw nuts to get the plate

STEP 5

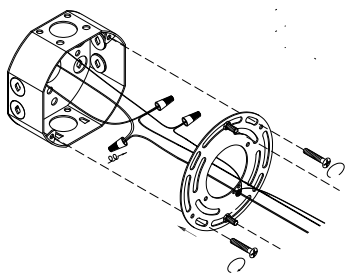


Pull the cable through the plate and wire to power (refer to fig.8), then fasten the plate to J-box.

STEP 6




Using the screw nut to fasten back the LED engine module to the plate.

STEP 7



Fasten the glass lens back to the LED engine module with original screws.

STEP 8

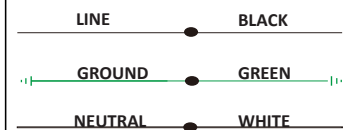

Wiring diagram.