

SAFETY INFORMATION

BE SURE THE POWER IS OFF! RISK OF ELECTRICAL SHOCK: Always use the switch to power off. The electrical system you want to connect the device to must be grounded. Read the instructions before using or powering this device. The safety instructions must remain with the unit in case of transfer. Any damage to the device linked to an inappropriate use is excluded from support by the warranty. Before connecting, make sure that the current and voltage are compatible with this device. We highly recommend that all installations are made by QUALIFIED ELECTRICIAN. We are NOT responsible by any means for the use or misuse of the following information. We are NOT responsible in whole or part for any harm or damage that may or may not be caused. We reserve the right to revise the components of any product, due to part availability or change ETL, CUL, UL standards without assuming any obligation or liability to modify any products previously manufactured and without notice. These instructions do not cover all details of variations in equipment, nor do they provide every possible contingency to be met. Turn off / unplug power when installing or service device.


PRE. INSTALLATION

- Carefully remove the fixture from the carton.
- Before beginning assembly, installation, or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.
- Tools required for assembly (Not Included): screwdriver, phillips screwdriver, pliers, electrical tape, wire cutters, safety glasses, ladder, wire stripper.


ACCESSORIES

1. Trim (anti-glare trim)
2. Finish
3. Surface Mounted Cover
4. User Manual
5. Screw(s) and Wire nut(s)
6. Surface Mount Canopy Kits for Surface J-box

WIRING




ASSEMBLY

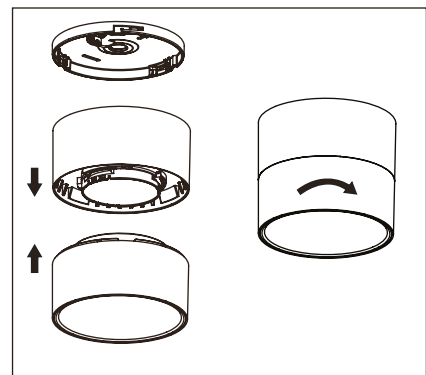

Trims are installed by pushing upward and turning clockwise to lock into place.

INSTALLATION

— Before beginning installation, turn off the circuit breaker

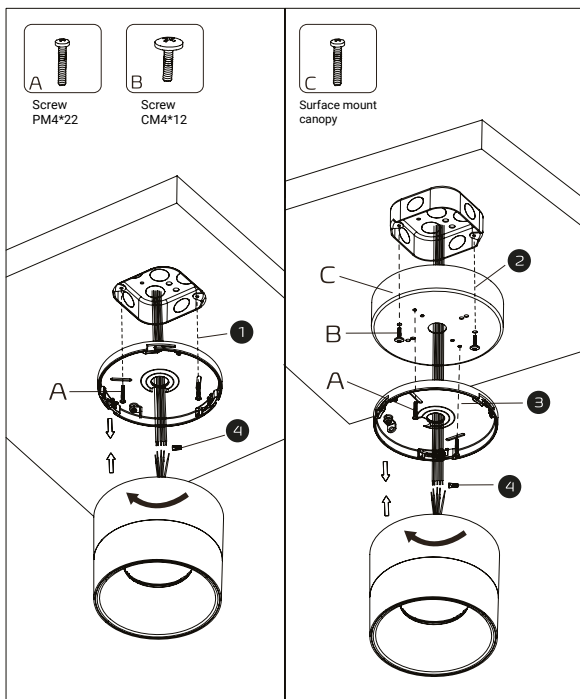

Surface Mounted in the recessed j-box

Surface Mounted in the surface j-box

→ STEP 1

For recessed J-box: Install the surface mounted cover to the junction box (1)

For surface J-box: Use the surface mounted canopy C with screw B to cover the surface J-box firstly (2), then fix the surface mounted cover to it (3)

→ STEP 2

Wiring (4) Refer to wiring diagram

→ STEP 3

Fix the cylinder to the surface mounted cover clockwise, and complete the installation

CYCLO ROUND


Pendant

Installation Manual

4" CYCLO PENDANT WITH CABLE

Recessed J-box


Surface J-box

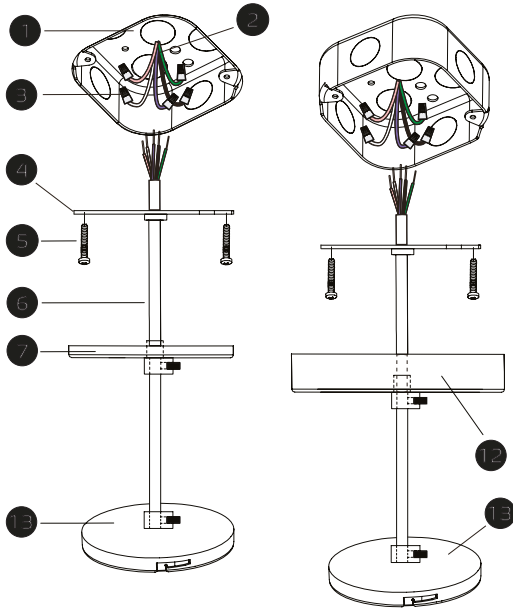














6" OR 8" CYCLO PENDANT WITH CABLE

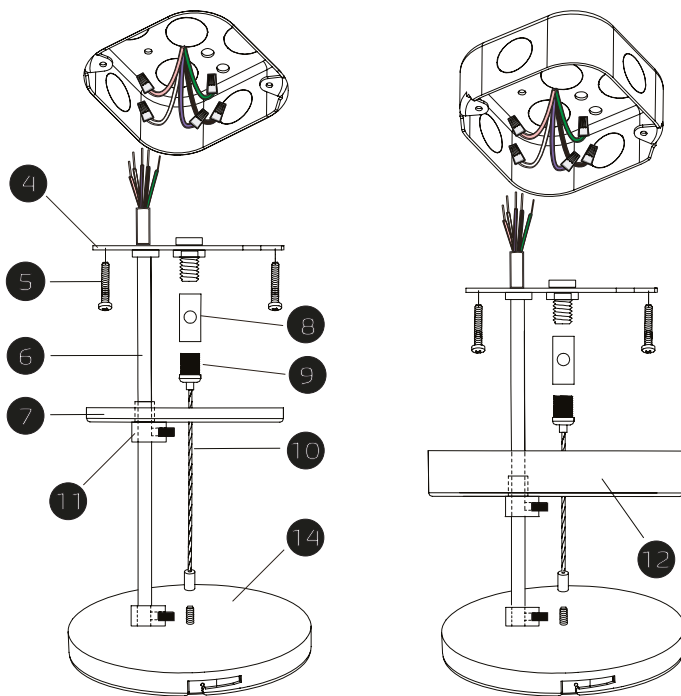Recessed J-box

Surface J-box




 WIRE NUT	 JUNCTION BOX CROSSBAR
 SCREW PM4*22	 POWER CORD
 4" CANOPY POWER FEED	 CABLE HOLDER
 STRAIN RELIEF THREAD NUT	 AIRCRAFT CABLE
 CABLE CLIP	 for 4" cylinder
 4" CABLE COVER	 for 6"/8" cylinder 6" CANOPY POWER FEED
 6"/8" CABLE COVER	

PARTS LIST


1. 4" Octagon Junction Box (By others)
2. Power cord
3. Wire nut
4. Junction box crossbar
5. Screw PM4*22
6. Power cord
7. 4" Power canopy kit
8. Cable holder
9. Strain relief thread nut
10. Aircraft cable
11. Cable clip
12. 6" Canopy power feed
13. 4" Cable cover
14. 6"/8" Cable cover









PENDANT WITH STEM

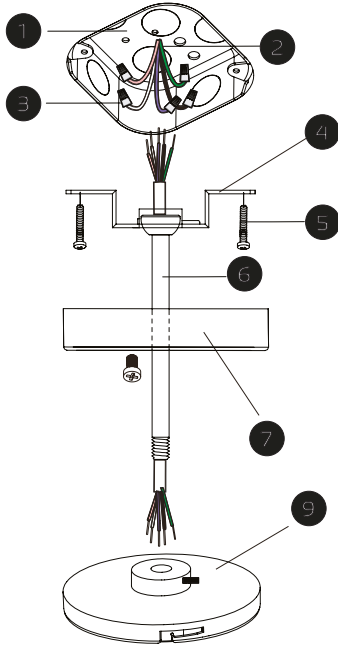Recessed J-box

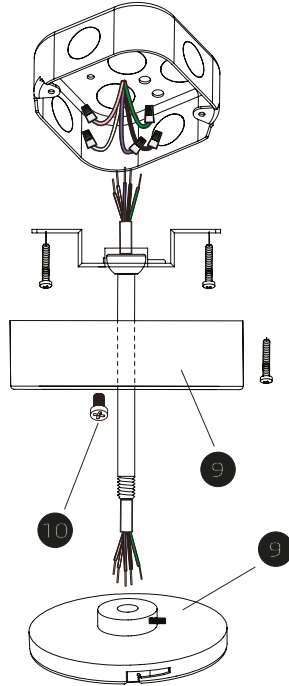

Surface J-box



 WIRE NUT	 JUNCTION BOX CROSSBAR	 SCREW PM4*22
 STEM KITS	 4" STEM CANOPY KITS	 6" STEM CANOPY KITS
 4"/6"/8" STEM COVER	 SCREW PM3*5	

PARTS LIST

1. 4" Octagon Junction Box (By others)
2. Power cord
3. Wire nut
4. Junction box crossbar
5. Screw PM4*22
6. Stem kits
7. 4" Stem canopy kit
8. 6" Stem canopy kit
9. 4"/5"/8" Stem cover
10. Screw PM3*5

PROBLEM	POSSIBLE CAUSE	SOLUTION	CARE & MAINTENANCE
Light will not come on	A. Light switch is turned off. B. Fuse is blown or circuit breaker is turned off. C. Incorrect circuit wiring	A. Turn light switch on B. Replace fuse or turn circuit breaker on C. Verify that fixture is wired properly	CAUTION: Before attempting to clean the fixture, disconnect the power to the fixture by turning the breaker off or removing the fuse from the fuse box. This LED light fixture is made from quality materials that will last many years with minimum care and maintenance. You may want to clean the fixture with a soft cloth periodically. To maintain the best appearance of the fixture, do not use cleaners with chemicals, solvents or harsh abrasives. Do not use liquid cleaner on the LEDs, LED driver, or wiring inside the light fixture.