


KEY TECHNICAL DATA	
INPUT VOLTAGE	120 - 277V
CONTROL	WET LOCATION
WARRANTY	5 YEAR WARRANTY
WORKING TEMP.	-22°F ~ 120°F

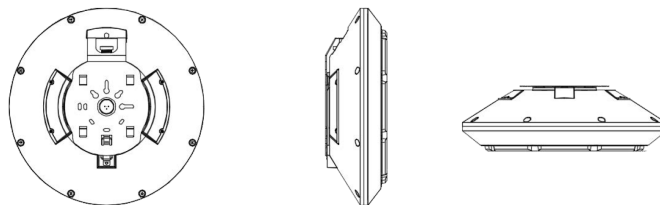

SAFETY INFORMATION

BE SURE THE POWER IS OFF! RISK OF ELECTRICAL SHOCK: Always use the switch to power off. The electrical system you want to connect the device to must be grounded. Read the instructions before using or powering this device. The safety instructions must remain with the unit in case of transfer. Any damage to the device linked to an inappropriate use is excluded from support by the warranty. Before connecting, make sure that the current and voltage are compatible with this device. We highly recommend that all installations are made by QUALIFIED ELECTRICIAN. We are NOT responsible by any means for the use or misuse of the following information. We are NOT responsible in whole or part for any harm or damage that may or may not be caused. We reserve the right to revise the components of any product, due to part availability or change ETL, CUL, UL standards without assuming any obligation or liability to modify any products previously manufactured and without notice. These instructions do not cover all details of variations in equipment, nor do they provide every possible contingency to be met. Turn off / unplug power when installing or service device.

PRE. INSTALLATION

- Carefully remove the fixture from the carton.
- Before beginning assembly, installation, or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.
- Tools required for assembly (Not Included): screwdriver, phillips screwdriver, pliers, electrical tape, wire cutters, safety glasses, ladder, wire stripper.


WARNINGS

- To prevent personal injury product damage, only licensed electricians should install
- To avoid electric shock or component damage, disconnect power before attempting installation or servicing
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state, and local electric codes and safety standards
- Disconnect product and allow cooling prior to servicing
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction
- To prevent product malfunction and/or electrical shock this product must be properly grounded
- This luminaire is designed to operate in ambient temperatures ranging from -22°F to 104°F and to be horizontally mounted with the LEDs facing down

INSTALLATION


—Before beginning installation, turn off the circuit breaker

Pendant with 3/4" Conduit

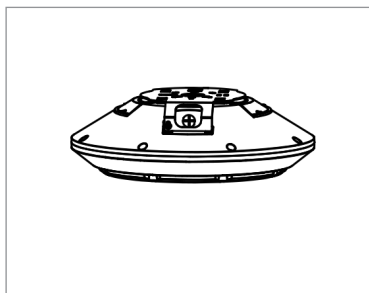


—STEP 1

Loosen the screw on side of the light, removing the bracket from the Canopy light by pulling it out.

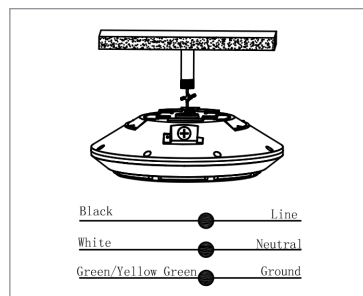

—STEP 2


Connect the wires threaded from conduit and Canopy, black wire for line, white for neutral, and yellow green for ground.

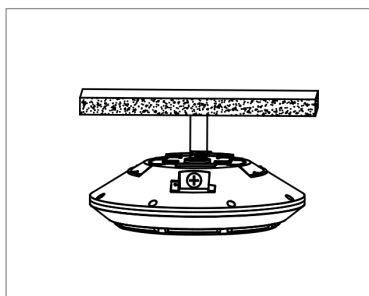

—STEP 3


Screw the conduit into the hole on top of Canopy light. Installation is now complete.

Surface Mounted with J-box

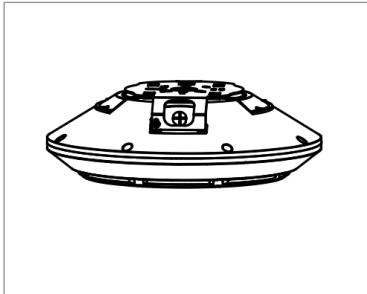


→STEP 1

Loosen the screw on side of the light, removing the bracket from the Canopy light by pulling it out.

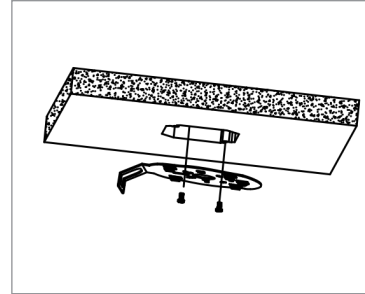


→STEP 2

Fix the bracket on junction-box, and put the wire through the central hole for wiring.

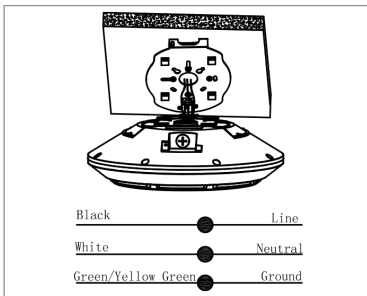

→STEP 3



Attach the Canopy light with bracket by putting the ring on the clips again. Connect the black wire for line, white for neutral, yellow green for ground.

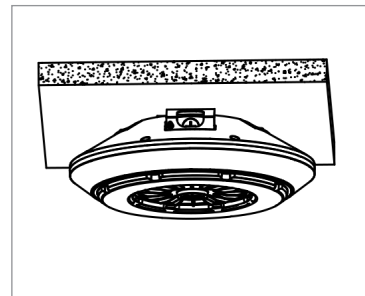

→STEP 4

Slide the Canopy lights into bracket, and secure the screw on side of the light to prevent the light sliding out from the bracket. The installation is complete.

CCT & Wattage Adjustable Installation Instructions

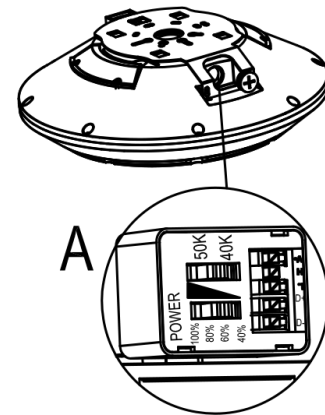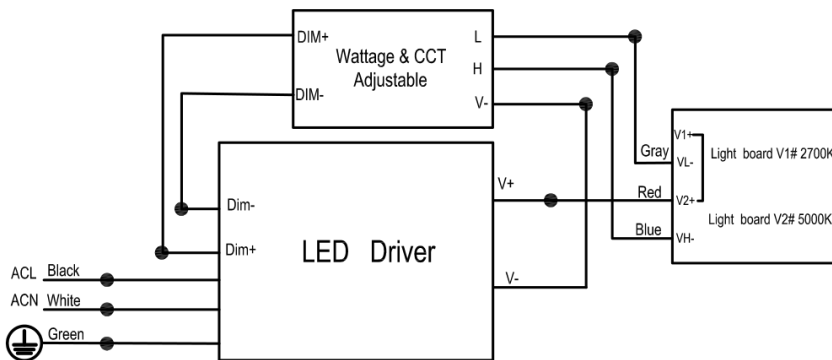

PROBLEM	POSSIBLE CAUSE	SOLUTION	CARE & MAINTENANCE
Light will not come on	A. Light switch is turned off. B. Fuse is blown or circuit breaker is turned off. C. Incorrect circuit wiring	A. Turn light switch on B. Replace fuse or turn circuit breaker on C. Verify that fixture is wired properly	CAUTION: Before attempting to clean the fixture, disconnect the power to the fixture by turning the breaker off or removing the fuse from the fuse box. This LED light fixture is made from quality materials that will last many years with minimum care and maintenance. You may want to clean the fixture with a soft cloth periodically. To maintain the best appearance of the fixture, do not use cleaners with chemicals, solvents or harsh abrasives. Do not use liquid cleaner on the LEDs, LED driver, or wiring inside the light fixture.