

LHC - Linear High Bay Compact

- HIGH LUMEN OUTPUT IN COMPACT SIZE EXTRUDED ALUMINUM HOUSING
- STANDARD Z10 RECEPTACLE FOR PLUG AND PLAY BI-LEVEL PIR SENSOR OPTION
- 3 LUMEN OUTPUT AND 2 CCT FIELD CHANGEABLE



LHC-22

LHC-14

TECHNICAL SUMMARY

SIZE:	11" x 14", 11" x 22"
WATTAGE:	Small: up to 140W / Large: up to 220W
LUMEN/EFFICACY	14"- Up to 18000LM* / 22"- Up to 30,000LM* / 135LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	4000K/5000K selectable / CRI >80
CONTROL	0-10V dimming driver, Bi-level occupancy PIR sensor with daylight harvesting
VALIDATIONS	ETL & cETL listed, FCC compliant, DLC 5.1 listed, RoHS
LIFETIME	L70>70,000 hours, 5 year warranty
DIFFUSION	Frosted PC lens
OPERATION TEMP.	-22°F ~ 104°F (w/o EM) / 34°F ~ 104°F (with EM)
FINISH	White

*Delivered lumen may vary, refer to photometric for full performance data

AVAILABLE ACCESSORIES

(SOLD SEPARATELY)




ANT-6-Z10-WH
Bi-level and daylight harvesting
PIR motion sensor



SCAN ME TO
DOWNLOAD
SPEC SHEET



DIMENSIONS

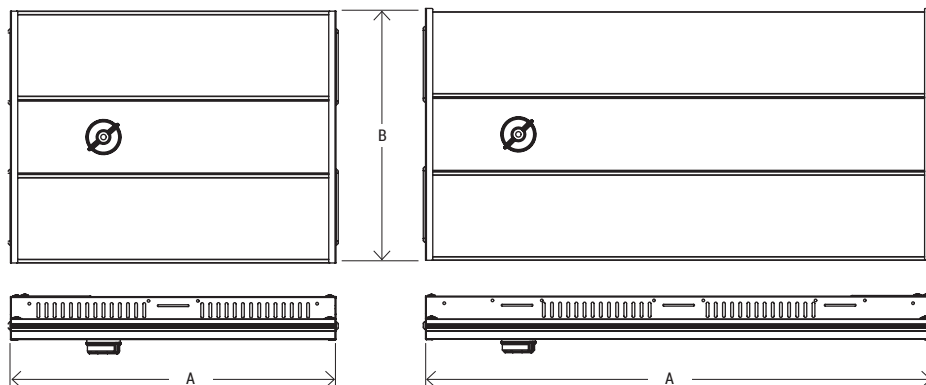

Model No.	A LENGTH	B WIDTH	C HEIGHT	WEIGHT
LHC-14	14"	11"	2.6"	5.2 lbs
LHC-22	22"			7.6 lbs

