

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------


KEY FEATURES

- Elegantly designed with visual-comfortable illumination performance
- Type III and V distribution with dark sky compliant option
- Optional -20°C emergency battery backup driver
- IK08 vandal resistant lens and housing


TECHNICAL SUMMARY

SIZE:	24" and 42" Overall height
WATTAGE:	30/25/18/12W
LUMEN/EFFICACY* (T3/T5)	2500/2100/1500/1000LM, 85LM/W
LUMEN/EFFICACY* (D3/D5)	2400/2000/1400/950LM, 80LM/W
INPUT VOLTAGE	120-277Vac or 277-480Vac
AVAILABLE CCT/CRI	30/40/50K changeable, 70+CRI, Custom
CONTROL	On/Off with 0-10V driver , On/Off with photocell
VALIDATIONS	ETL and cETL wet location listed, IP65 and IK08 rated, Dark sky compliant (D3/D5 option), FCC, RoHS
LIFETIME	L70>100,000 hours, 5 year warranty
DISTRIBUTION	Type V (D5 or T5), Type III (D3 or D5)
OPERATION TEMP.	-40°F ~ 122°F / -4°F ~ 122°F (with EM)
FINISH	Matte Black, Dark Bronze, Silver Gray, Matte White


*Delivered lumen may vary, refer to photometric for full performance data

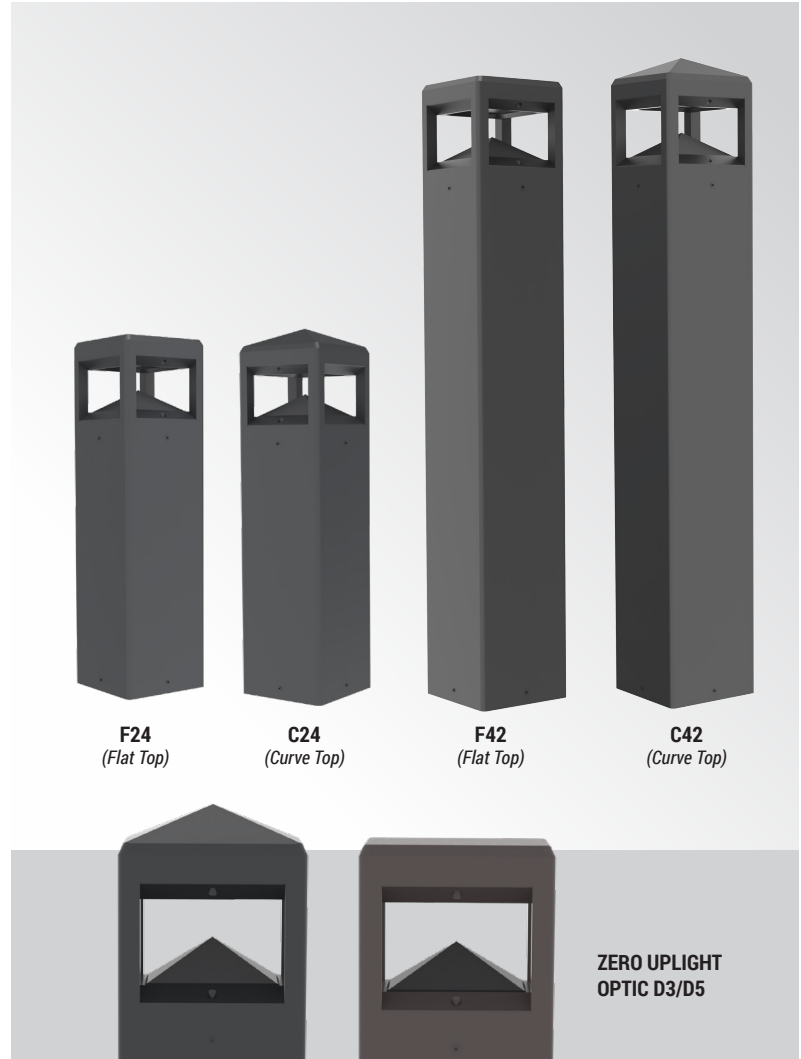

DIMENSIONS

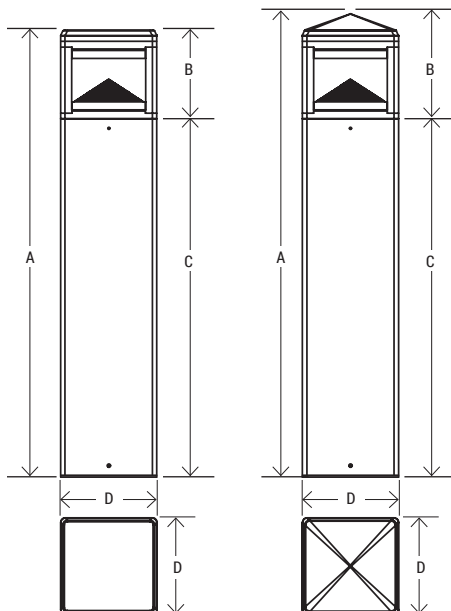

Model No.	A HEIGHT	B HEAD	C BODY	D DIAMETER	WEIGHT
BSA-F24	24.6"	6.2"	18.4"	6.7"	13 lbs
BSA-C24	25.7"	7.3"	18.4"	6.7"	14 lbs
BSA-F42	42.7"	6.2"	36.5"	6.7"	18 lbs
BSA-C42	43.8"	7.3"	36.5"	6.7"	19 lbs

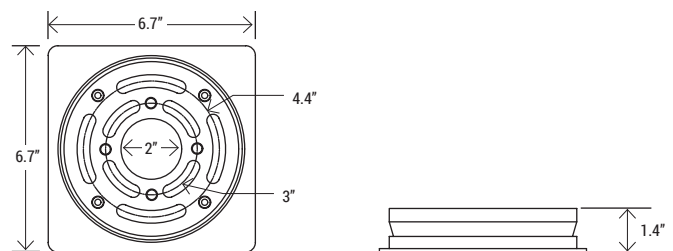


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series	Size	Lumen Package	Voltage	CCT	Light Distribution	Control	Finish	EM Option						
BSA - (Architectural Square Bollard)	F24 - (Flat top 24") C24 - (Curve top 24") F42 - (Flat top 42") C42 - (Curve top 42")	24LC - (2400/2000/ 1400/ 950LM) Custom*	U - (120-277V) H** - (277V-480V) <i>**EM option not available</i>	CC - (30K/40K/50K/Color Changeable) Custom* - (Custom single-CCT)	T5 - (Type V, U=3) D5* - (Type V, U=0) T3 - (Type III, U=2) D3* - (Type III, U=0) <i>*Comes with a pitch black cone</i>	C1 - (ON & Off 0-10V dimming) C2 - (On/Off with button photocell sensor)*	BK - (Matte Black) DB - (Dark Bronze) SG - (Silver Gray) WH - (Matte White) Custom RAL*	EM - (6W emergency option factory installed, cold-pack)						

FINISH REFERENCE

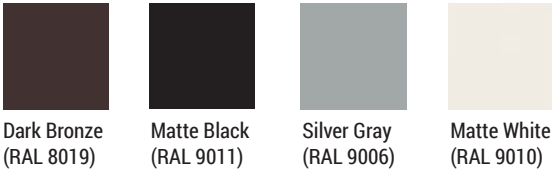

Dark Bronze (RAL 8019) Matte Black (RAL 9011) Silver Gray (RAL 9006) Matte White (RAL 9010)

PREMIUM HEAT-TRANSFER WOOD FILM BODY FINISH*



WW Walnut wood dark finish
BW Cherry wood brown finish
OW Oakwood light finish

*Accessories

- SP-EM6C** - Factory Installed 6W EM battery cold pack
- BR-ANC** - Anchor base mounting kit (Required for installation, pre-ship option available)

*Available accessories sold separately



BR-ANC
Anchor base mounting kit
(Required for installation, pre-ship option available)

*Wood Body Finish

- WW** - (Walnut wood dark finish)*
- BW** - (Cherry wood brown finish)*
- OW** - (Oakwood light finish)*

SPECIFICATIONS

CONSTRUCTION

Low copper aluminum alloy die-cast top with extruded aluminum body

FINISH

Exterior parts are protected by a rust and corrosion proof zinc-infused polyester powder coating. T5 and T3 comes with a cone same color as the housing. D5 and D3 comes with a pitch black cone for zero upright.

OPTICS/DIFFUSER

Injection molded optic with UV proof PC lens available in Type III or Type V distribution.

ELECTRICAL

Long life LED system, Outdoor rated LED driver that accommodates input voltages of 120-277Vac or 277-480Vac, at 50/60Hz with 0-10v dimming control function, CCT changeable.

MOUNTING

Anchor based mounting (anchors sold separately)

VALIDATIONS

ETL and cETL wet location listed, IP65 and IK08 rated, Dark sky compliant optional (D3/D5), FCC, RoHS