

DFLV

Wall Mount Linear Vandal Resistant Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------


KEY FEATURES

- Aesthetic pleasing vandal proof linear egress luminaire
- Cast aluminum end-capped housing with easy service access
- Dark sky compliant zero up light full cut-off distribution
- Multiple factory emergency backup battery options available
- Multiple lighting controls options available


TECHNICAL SUMMARY

SIZE:	1 (18"), 2 (30"), 3 (42"), 4 (54"), 6 (80"), custom
WATTAGE:	55/50/40/30/20/10W, custom
LUMEN/EFFICACY	6000/5000/4000/3000/2000/1000LM available / 100LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	3000/4000/5000K CCT changeable, custom / 80+ CRI
CONTROL	On/off with 0-10V driver, photocell control, bi-level motion sensor control
VALIDATIONS	cETL & ETL wet location listed, IK08 (lens), IK10 (housing), FCC, RoHS, Dark Sky Compliant
LIFETIME	Projected L70 > 150,000 hours, 5 year warranty
OPERATION TEMP.	(-40°F ~ 131°F No emergency / 32°F ~ 122°F Normal Emergency / -13°F ~ 122°F Cold weather rated emergency)
FINISH	Dark Bronze, Matte Black, Silver Gray, Matte White. Custom

*Delivered lumen may vary, refer to photometric for full performance data

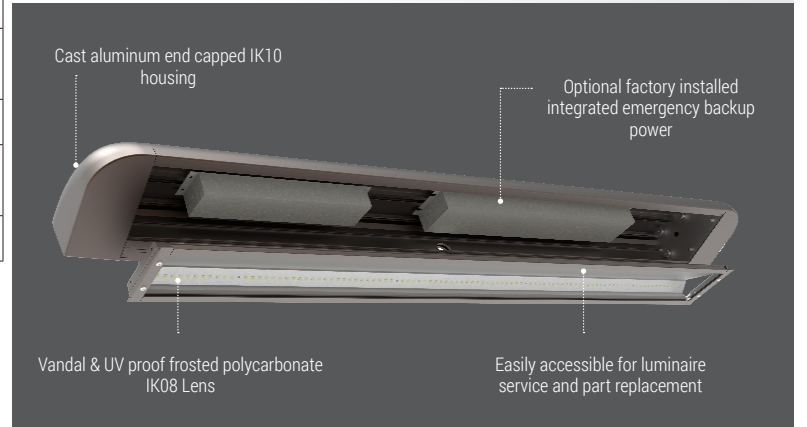

DIMENSIONS

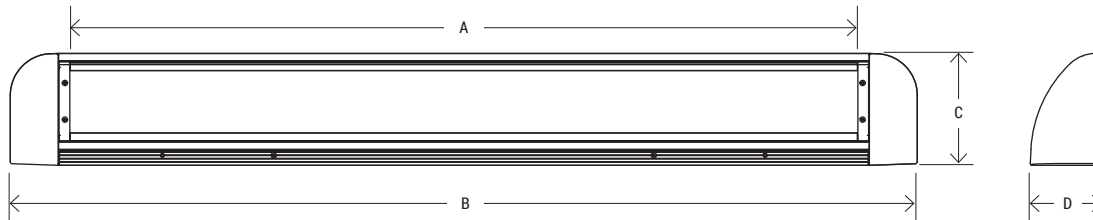

Model No.	A LENS	B LENGTH	C WIDTH	D HEIGHT	WEIGHT (LBS)
DLFV-1	13"	18"	5.5"	3.5"	6
DLFV-2	24"	30"			9
DLFV-3	36"	42"			12
DLFV-4	48"	54"			15
DLFV-6	73"	80"			20

DFLV

Wall Mount Linear Vandal Resistant Luminaire


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

Series	Size	Lumen Package	Voltage	CCT	Control	Finish	EM
DFLV	1 (18")	10L - (10W)	U - (120-277V)	CC - (30/40/50K Color Changeable) Custom*	C1 - (On/off with 0-10V dimming driver) C2 - (Button on/off photocell) C3 - (Bi-level motion/ Daylight harvesting sensor)	DB - (Dark Bronze) BL - (Black) WH - (White) SG - (Silver Gray) RAL - (Custom)*	EM1 - (9W EM) EM3 - (6W Cold-pack EM) EM4 - (4W EM) for DFLV1
		20L - (20W)					
	2 (30")	20L - (20W)					
		3 (42")					
	4 (54")						
		6 (80")					
	Custom*	Custom					

*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)



DFLV-1-FLS-BL/DB/WH/SG
DFLV-2-FLS-BL/DB/WH/SG
DFLV-3-FLS-BL/DB/WH/SG
DFLV-4-FLS-BL/DB/WH/SG
DFLV-6-FLS-BL/DB/WH/SG



DFLV-MMB

FINISH REFERENCE




Dark Bronze
(RAL 8019)



Matte Black
(RAL 9011)



Silver Gray
(RAL 9006)



Matte White
(RAL 9010)

*Accessories

- DFLV-1-FLS-BL/DB/WH/SG** - 1ft glare (front) shield, choose black, dark bronze, white, silver gray
- DFLV-2-FLS-BL/DB/WH/SG** - 2ft glare (front) shield, choose black, dark bronze, white, silver gray
- DFLV-3-FLS-BL/DB/WH/SG** - 3ft glare (front) shield, choose black, dark bronze, white, silver gray
- DFLV-4-FLS-BL/DB/WH/SG** - 4ft glare (front) shield, choose black, dark bronze, white, silver gray
- DFLV-6-FLS-BL/DB/WH/SG** - 6ft glare (front) shield, choose black, dark bronze, white, silver gray
- DFLV-MMB** - Mullion mount set
- RC-100** - Remote sensor programmer

*Available accessories sold separately, please refer next page for details

SPECIFICATIONS

CONSTRUCTION

Marine grade heat treated extruded aluminum with A383 or equivalent grade die-cast aluminum end caps.

FINISH

Finished with rust and corrosion proof polyester powder coating.

OPTICS/DIFFUSER

UV stabilized diffused matt finish polycarbonate secured to fixture via integral concealed hinge and captive stainless steel TORX® head screws. TORX® Screwdriver Bit is included.

ELECTRICAL

Long life LED system, 30/40/50K CCT changeable with a Class 2, constant current 0-10V dimmable, 120V-277Vac, 50-60 HZ driver, factory installed integrated emergency driver optional.

MOUNTING

Wall Mount, mullion mount.

VALIDATIONS

cETL & ETL Wet location listed, IK08, IK10, FCC, RoHS, Dark Sky compliant