

DFU COLOR

Vandal Resistant Utility Luminaire with Color

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------



KEY FEATURES

- Compact and slim profile IP65/IK10 rated cast-aluminum housing
- Adjustable arm can be used for wall or ceiling mount
- Optional new construction J-box with side knockout for power leads
- Field changeable between 5000K, Red, Green, Blue color



TECHNICAL SUMMARY

WATTAGE:	18/15/13W changeable in 5000K, Red, Blue and Green LED
LUMEN/EFFICACY	2500/2000/1600LM at 5000K white light
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	5000K, Red, Green, Blue, CCT changeable, >80CRI at 5000K
CONTROL	On/off with 0-10V driver
VALIDATIONS	UL & cUL wet location Listed, IP65 rated, IK10, FCC, RoHS
LIFETIME	L90>50,000 hours, 5 year warranty
SURGE PROTECTION	10Kv SPU
OPERATION TEMP.	-40F - 104F
FINISH	Aluminum

*Delivered lumen may vary, refer to photometric for full performance data

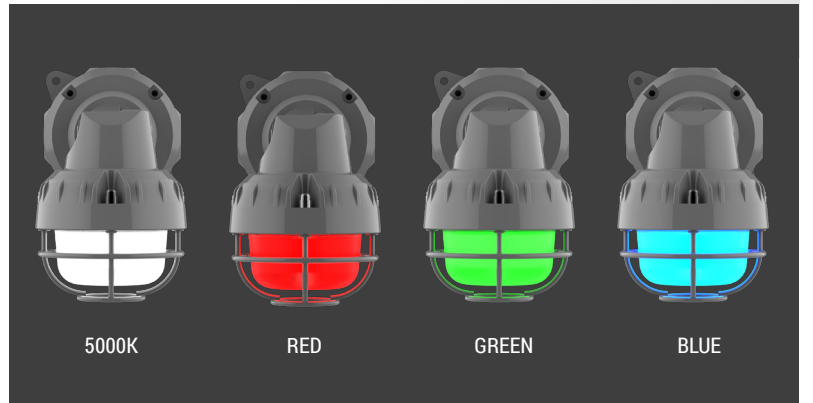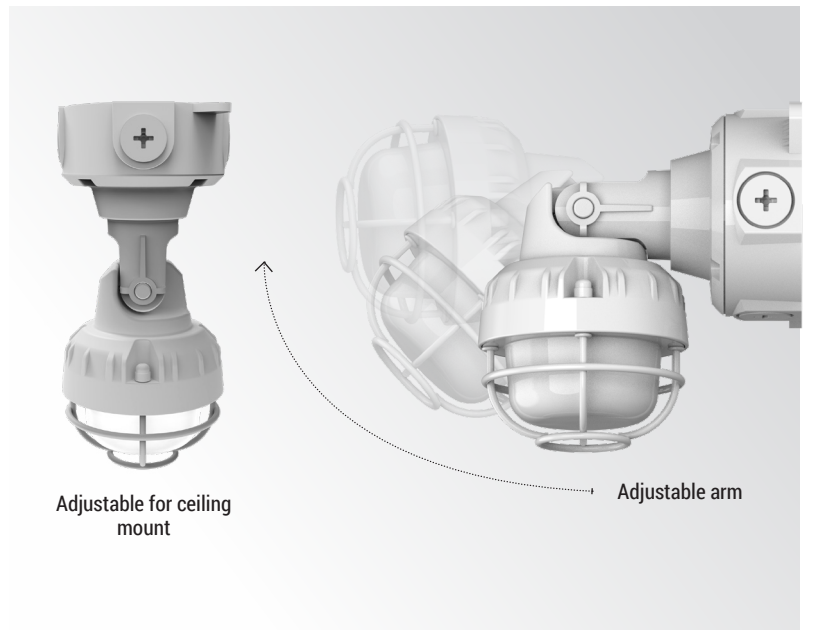

DIMENSIONS

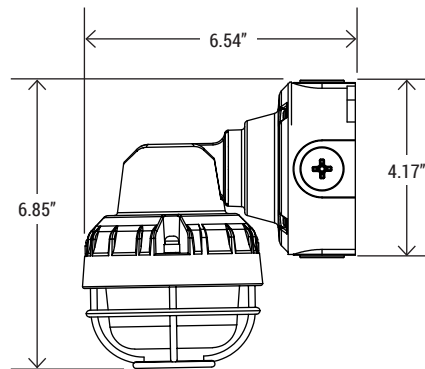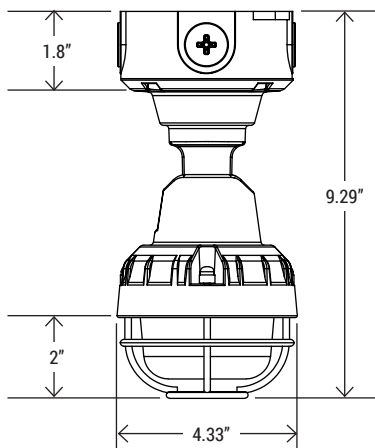

WEIGHT: 4 lbs

DFU COLOR

Vandal Resistant Utility Luminaire with Color


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION


*Additional cost and/or lead time on customized fixtures may apply.

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series	Lumen Package	Voltage	CCT	Control	Mounting			
DFU Vandal Resistant Utility Luminaire	25LC - (2500/2000/1600LM at 5000K white light)	U - (120-277V)	RGB5 - (R/G/B/5000K Changeable)	C1 - (on/off with 0-10V dimming driver)	NC - (New construction with J-box mount) RT - (Retrofit to existing J-box)			

MOUNTING OPTIONS

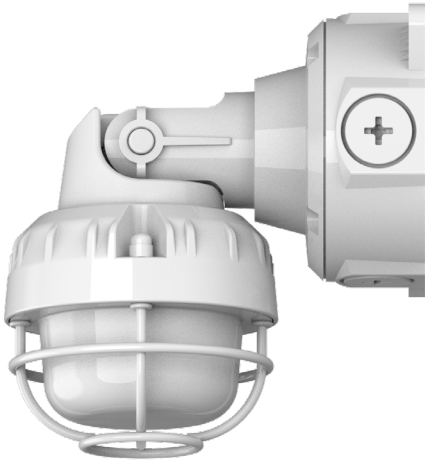

NC
New construction with J-box mount

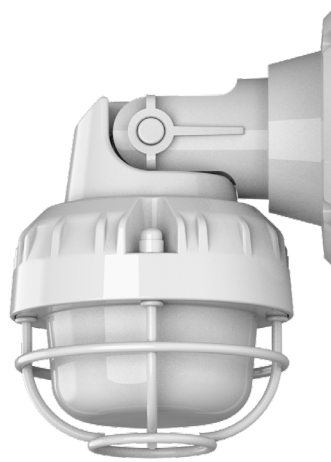

RT
Retrofit to existing J-box

SPECIFICATIONS

CONSTRUCTION

Cast-aluminum housing with stainless steel tamper-proof screws.

FINISH

Powder coated in aluminum finish.

OPTICS

High impact and UV resist polycarbonate frosted lens with aluminum wire guard.

ELECTRICAL

Long life LED system, Red/Green/Blue/5000K changeable with a Class 2, constant current 0-10V dimmable, 120V-277Vac, 50-60 HZ driver.

VALIDATIONS

UL & cUL wet location Listed, IP65 rated, IK10, FCC, RoHS

MOUNTING

New construction or retrofit surface mount with or with J-box and adjustable arm.