

DAY/DAWN

Architecture Surface Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Unique sculptural shape luminaire design
- Hydrographic inner trim finish creating remarkable visual impact
- Uniformed delivery of 90CRI illumination with CCT changeable
- 0-10V lighting control function capable of dim to 1%

TECHNICAL SUMMARY


SIZE:	20" outer diameter
WATTAGE:	40W
LUMEN/EFFICACY	2400LM* / up to 65 LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	3000/4000 CCT changeable / 90+ CRI
CONTROL	0-10V dimming
VALIDATIONS	ETL listed for indoor use only
LIFETIME	L70>56,000 hours, 5 year warranty
OPERATION TEMP.	-5°F ~ 104°F
FINISH	Matte white/black + hydrographics wood grain style

*Delivered lumen may vary, refer to photometric for full performance data



DWS
(Shown in Black)



DWD
(Shown in White)

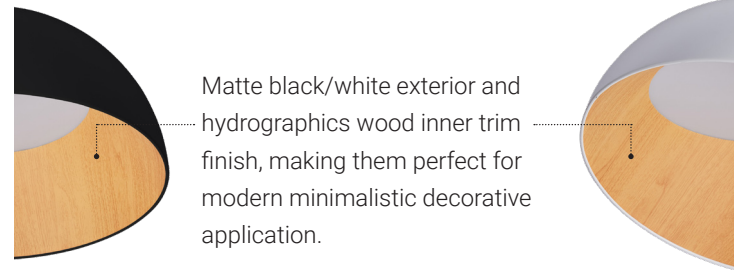

DWD
(Shown in Black)

DWS
(Shown in White)

DIMENSIONS

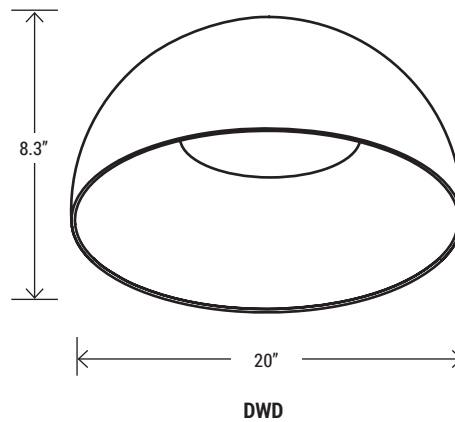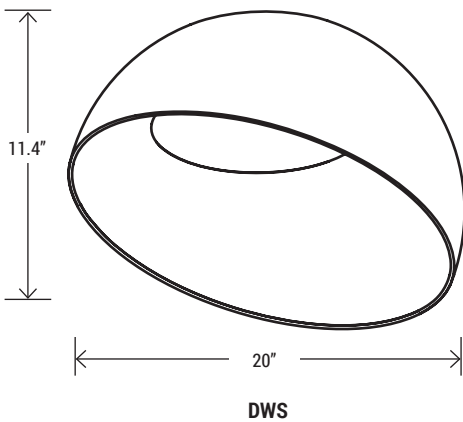

DAY/DAWN

Architecture Surface Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series	Size	Lumen Package	Voltage	CCT	Control	Finish				
DWS	20 - (20" dia.)	24L - (2400lm/40W) Custom	U - (120-277V)	CC - (3000K/4000K Color Changeable) Custom CCT (made to order)	C1 - (0-10V@1%)	BW - (Matte Black with wood trim) WW - (Matte White with wood trim)				
DWD										

*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)



WP-CEP-12C-200VPE1



MFR4

*Accessories

- WP-CEP-12C-200VPE1** - 12W Emergency Back-Up Power Inverter (Remote mount)
- MFR4** - 4" electrical junction box housing)

SPECIFICATIONS

CONSTRUCTION

Aluminum housing with steel mounting bracket for J-box.

FINISH

Powder coating matte black and white finish on the outside and with hydro graphics material in wood grain style design on the inside.

OPTICS

Deep frosted acrylic diffuser.

ELECTRICAL

Long life LED system, input voltages 120-277Vac, 30/40K CCT changeable. 0-10V dimming to 1% to off.

MOUNTING

Surface mount (wall or ceiling) directly to an industry standard 4" metal or plastic octagon junction box with 3-1/2" junction box screw-hole spacing. Luminaire provided with leads for direct wire connection in junction box.

VALIDATIONS

ETL Dry location listed, FCC, RoHS