

DASH

Slim Pendant

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES


- Modern stylish and super slim
- Downlight along with special uplight feature
- Dimming technology

TECHNICAL SUMMARY

SIZE	40", 60"
WATTAGE	40": 30W 60": 45W
LUMEN/EFFICACY*	40": 1800LM; 60LM/W 60": 2800LM; 60LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	30K, 35K, 40K; 80CRI
CONTROL	0-10V 10%, Athena Wireless Controls
VALIDATION	cETL & ETL Damp Location listed, FCC, RoHS
DISTRIBUTION	25% uplight, 75% downlight
LIFETIME/WARRANTY	L70>56,000 HRS, 5 YR warranty
OPERATION TEMP	-4°F ~ 104°F
FINISH	Black, White, Woodgrain, Custom



Woodgrain Finish

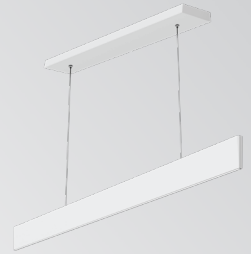

White Finish




Black Finish

*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

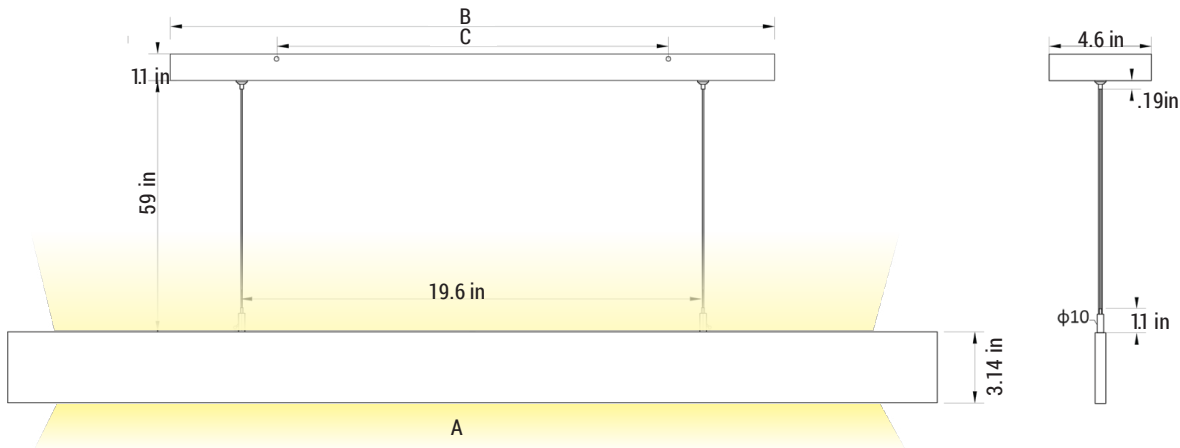

	WEIGHT	A	B	C
SLLF-L100	8.8 lbs	39.5"	25.5"	15.7"
SLLF-L150	10.5lbs	57.6"	33.4"	23.6"

DASH

Slim Pendant

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

	-		-		-		-	
Series	Size	Lumens Package	CCT	Finish	Control*			
SLLF - (Dash Slim Pendant)	L100 - (40")	18L - (1800 lm/30W)	30K - (3000K) 35K - (3500K) 40K - (4000K)	BK - (Black) WH - (White) WG - (Woodgrain) RAL - (Custom Color)*	A1* - Lutron Athena wireless dimming (A-WN-D01-RF) A2* - Lutron Athena with Bi-level occupancy & daylight (A-WN-D01-OCC)			
	L150 - (60")	28L - (2800 lm/45W)						

ACCESSORIES



A2 A-WN-D01-RF-WH
Static White Athena Lighting Control
(Shown in White)




A2 A-WN-D01-OCC-WH
Static White bi-level Athena pir with daylight harvesting
(Shown in White)



A1A-WN-D01-RF-BL
Static White Athena Lighting Control
(Shown in Black)



A2 A-WN-D01-OCC-BL
Static White bi-level Athena pir with daylight harvesting
(Shown in Black)

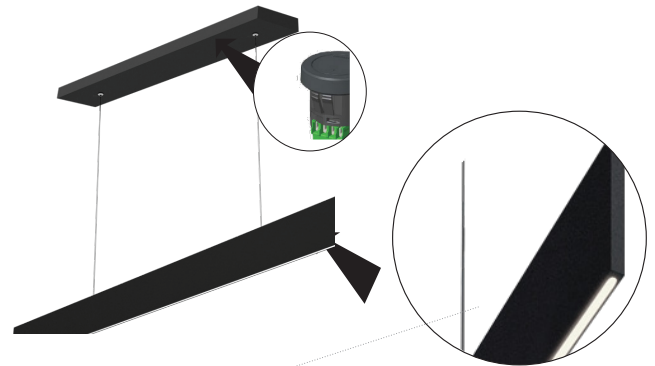

Minimal aesthetic suspended linear fixture with only 0.3" aperture and direct/indirect distributions that achieves the ideal illumination in any interior space.

SPECIFICATIONS

CONSTRUCTION

One-piece die-casted steel housing.

FINISH

Powder-coated finish. Black, White, Woodgrain, or RAL code.

OPTICS

0.3" width acrylic cosmetic diffuser secured to the housing to ensure uniform illumination.

ELECTRICAL

Class 2, constant current, 120V-277Vac, 50-60 Hz. 0-10V Dimming. L70>56,000 hours.

VALIDATIONS





cETL & ETL certified. Damp Location. RoHS. FCC.

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------



Athena

An uncompromising solution. The Athena lighting control system empowers architects, lighting designers, electrical engineers, and facility managers with a native network of lighting, lighting controls, shades, and cloud-connected software that deliver exceptional experiences and building management.

	<p>A-WN-D01-RF-WH Plenum rated and can be installed above the ceiling for wireless control of a fixture without any impact on fixture aesthetics.</p>
	<p>A-WN-D01-RF-BK Plenum rated and can be installed above the ceiling for wireless control of a fixture without any impact on fixture aesthetics.</p>
	<p>A-WN-D01-OCC-WH Provides wireless control of the fixture and includes a passive infrared (PIR) sensor for occupancy and a daylight sensor.</p>
	<p>A-WN-D01-OCC-BK Provides wireless control of the fixture and includes a passive infrared (PIR) sensor for occupancy and a daylight sensor.</p>