


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

- KEY FEATURES
- Recessed luminaire available in three fixed lengths and apertures, it can create pleasing illumination.
 - A selectable slide switch comes standard with three selectable wattage levels and three selectable color temperatures.
 - Provides the flexibility to adapt to the changing needs of the space, setting, or environment.

TECHNICAL SUMMARY


SIZE	2'x4", 4'x4", 8'x4", 2'x6", 4'x6", 8'x6"
WATTAGE	2'x4" • 2'x6": (20W/15W/10W) 4'x4" • 4'x6": (40W/30W/20W) 8'x4" • 8'x6": (80W/60W/40W)
LUMEN/EFFICACY*	2'x4": 1700/1280/860LM; Up to 86LM/W 4'x4": 3400/2500/1600LM; Up to 85LM/W 8'x4": 6800/5100/3400LM; Up to 85LM/W 2'x6": 1900/1440/960LM; Up to 96LM/W 4'x6": 3800/2800/1900LM; Up to 95LM/W 8'x6": 7600/5700/3800LM; Up to 95LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	30K/35K/40K Color Changeable; 80+CRI
CONTROL	0-10V dimming to 10%
VALIDATIONS	UL & cUL Damp Location Listed, FCC, RoHS Compliant
LIFETIME/WARRANTY	>50,000 HRS, 5 Yr Warranty
BEAM ANGLE	100°
OPERATION TEMP	-30°F ~ 122°F

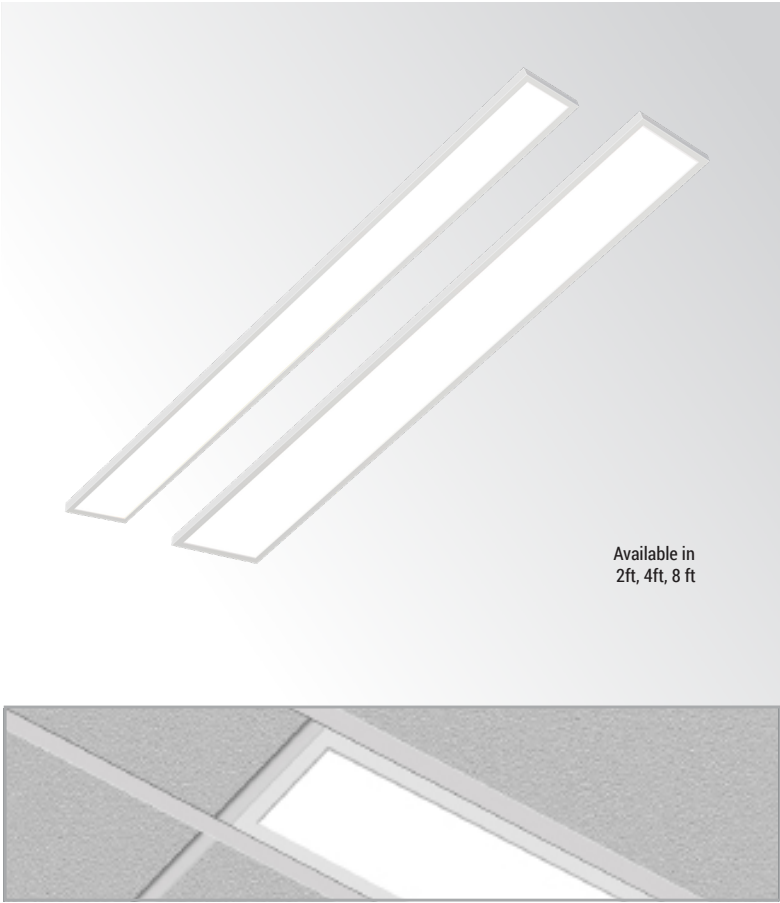

*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

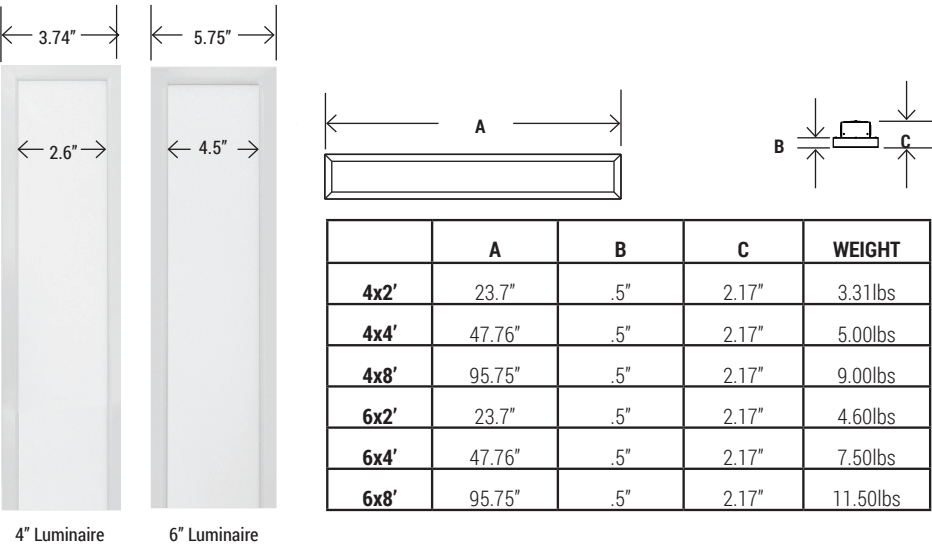

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

-

-

-

-

Series	Size	Lumen Package	Input Voltage	CCT
LAR	24 - (2'x4")	17LC - (1700/1280/860LM)	U - (120 -277Vac)	CC - (30/35/40K Color Changeable)
	44 - (4'x4")	34LC - (3400/2500/1600LM)		
	84 - (8'x4")	68LC - (6800/5100/3400LM)		
	26 - (2'x6")	19LC - (1900/1440/960LM)		
	46 - (4'x6")	38LC - (3800/2800/1900LM)		
	86 - (8'x6")	76LC - (7600/5700/3800LM)		

*Additional cost and/or lead time on customized fixtures may apply.

AVAILABLE ACCESSORIES

*SOLD SEPARATELY

LAR Drywall Recessed Kit	
FIXTURE	CEILING OPENING
LAR-24-DFK (L 2' X W 4")	L 24 3/4" X W 4 3/4"
LAR-26-DFK (L 2' X W 6")	L 24 3/4" X W 6 3/4"
LAR-44-DFK (L 4' X W 4")	L 48 3/4" W 4 3/4"
LAR-46-DFK (L 4' X W 6")	L 48 3/4" X W 6 3/4"
LAR-84-DFK (L 8' X W 4")	L 96 3/4" X W 4 3/4"
LAR-86-DFK (L 8' X W 6")	L 96 3/4" X W 6 3/4"



*AVAILABLE IN: 4" & 6" widths

SPECIFICATIONS

CONSTRUCTION

Cast-aluminum extruded housing with precision welded corners for a sleek appearance. Junction/wiring box included. With standard T-bar clips.

FINISH

White powder-coated finish

OPTICS

Precision laser cut optical grade acrylic guide provides uniformed edge-lit lighting distribution.

ELECTRICAL

Universal input voltage: 120V-277Vac. Standard Class 2 isolated drivers with 1-10V dimming. IES files available upon request.

VALIDATIONS

cUL & UL Damp Location Listed, FCC, RoHS Compliant