

PKL2

Parking Lot Area Light

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Streamline aesthetic design with low effective projected area housing value
- IP65/IK10 rated
- Multiple mounting option available
- Modern design and good looks complement its ruggedness and powerful operation.


TECHNICAL SUMMARY

WATTAGE:	60W, 100W, 150W, 200W, 300W
LUMEN/EFFICACY*	8700LM, 13000LM, 21000LM, 27000LM, 42132LM 130-145LM/W
INPUT VOLTAGE	120-277Vac; 277-480Vac (Optional)
AVAILABLE CCT/CRI	40K, 50K / 70+ CRI
CONTROL	On/off with 0-10V driver no dimming wire / Bi-level sensor control / Photocell control
VALIDATIONS	ETL & cETL wet location listed, IP65 and IK10 rated, RoHS, FCC compliant, DLC Premium listed
LIFETIME	L70>54,000 hours, 5 year warranty
OPERATION TEMP.	-22°F ~ 113°F
FINISH	Dark Bronze

*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

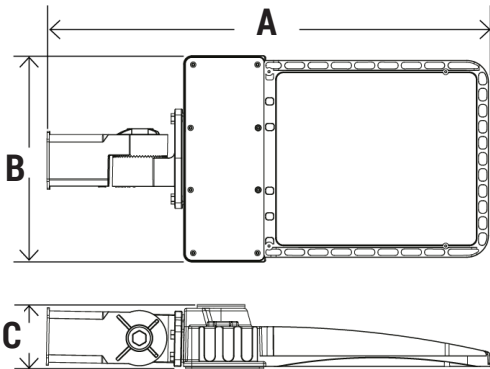

Product	EPA	Weight	A	B	C
PKL2-87L	0.621 Ft²	12lbs	23.92"	11.15"	3.35"
PKL2-130L	0.641 Ft²	12lbs	23.92"	11.15"	3.35"
PKL2-210L	0.642 Ft²	15lbs	23.4"	11.15"	3.35"
PKL2-270L	0.644 Ft²	15lbs	23.4"	11.15"	3.35"
PKL2-420L	0.677 Ft²	27lbs	23.35"	15.85"	3.35"

PKL2

Parking Lot Area Light

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

	-		-		-		-	
Series	Lumen Package	Input Voltage	CCT	Light Distribution	Control	Finish	Mounting*	
PKL2	87L - (8700LM/60W) 130L - (13000LM/100W) 210L - (21000LM/150W) 270L - (27000LM/200W) 420L - (42000LM/300W)	U - (120 - 277Vac) H - (277 - 480Vac)*	40K - (40K)* 50K - (50K)	T2 - (Type II)* T3 - (Type III) T4 - (Type IV)* T5 - (Type V)*	C1 - (On/Off with 0-10V Driver No Dimming Wires) CMM - (0-10V Bi-level microwave motion sensor)* C4 - (3-Pin Receptacle with Short Cap)* C5 - (3-Pin Receptacle with Photocell)*	DB - (Dark Bronze)	SF - (Slip-Fitter) AM1 - (Straight to Square Pole Mount) AM2 - (Straight to Pole w/ Round Pole Adapter) TR - (Trunnion Bracket Mount)	

*Additional cost and/or lead time on customized fixtures may apply. Customizable products cannot be returned.

ACCESSORIES*



PKL2-S-HSS, for up to **200W**
PKL2-L-HSS, for **300W ONLY**
House side shield

*Accessories

PKL2-L-HSS / PKL2-S-HSS - House side shield for PKL2
RC-100 - Remote for CMP
PKL2-TA-SLP - Slip-Fitter
PKL2-TB-S2P - Arm Mount
PKL2-TC-TRN - Trunnion Mount
PKL2-TB-ADPT - Pole Adapter

*Available accessories sold separately

MOUNTING OPTIONS



PKL2-TA-SLP
Slip-Fitter



PKL2-TB-S2P
Arm Mount



PKL2-TC-TRN
Trunnion Mount



PKL2-TB-ADPT
Pole Adapter

SPECIFICATIONS

CONSTRUCTION

Shell materials: aluminum & PC. Wrapped in die-cast aluminum.

FINISH

Dark Bronze polyester coating.

OPTICS

High precision molded proprietary polycarbonate lenses engineered for superior lighting distribution. Option of Type II, III, IV, V lenses available.
*(Lens standard type III).

ELECTRICAL

Class 2, constant current, non-dimmable, 100V-277V, 50/60 HZ, 0.95Amp@100V, Inventronics brand.

LISTINGS

UL & cUL certified. DLC Premium. Luminaire is IP65 rated. Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/qpl> to confirm qualification.

MOUNTING

Slip-Fitter, Arm Mount, Trunnion Mount, Pole Adapter.

PKL2

Parking Lot Area Light

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------



DLC Listed

Visit <https://www.designlights.org/qpl> to confirm qualification.

Spitzer Model No.	DLC Product ID
PKL2[P,Blank]-270L-U-40K-T2-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-0XVGE7
PKL2[P,Blank]-420L-U-50K-T2-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-107YZI
PKL2[P,Blank]-210L-U-50K-T4-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-1RHPM2
PKL2[P,Blank]-210L-U-40K-T5-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-2ZW4DL
PKL2[P,Blank]-210L-U-40K-T3-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-39G6XO
PKL2[P,Blank]-210L-U-50K-T2-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-3YJOLR
PKL2[P,Blank]-420L-U-40K-T3-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-61BJRM
PKL2[P,Blank]-210L-U-50K-T5-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-7ETV40
PKL2[P,Blank]-270L-U-40K-T3-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-7N4VM2
PKL2[P,Blank]-270L-U-40K-T4-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-7VRF7O
PKL2[P,Blank]-420L-U-50K-T3-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-A30BSC
PKL2[P,Blank]-420L-U-40K-T5-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-AMK7JS
PKL2[P,Blank]-270L-U-40K-T5-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-AU0KP6
PKL2[P,Blank]-87L-H-40K-T3-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-CLKXDM
PKL2[P,Blank]-130L-U-40K-T5-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-DRZAV4
PKL2[P,Blank]-270L-U-50K-T3-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-FAV07C
PKL2[P,Blank]-210L-U-40K-T2-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-FPX7KR


PKL2[P,Blank]-210L-U-50K-T3-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-GE8SOK
PKL2[P,Blank]-130L-U-40K-T4-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-H8ER4L
PKL2[P,Blank]-130L-U-50K-T2-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-HC9E4Q
PKL2[P,Blank]-420L-U-40K-T4-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-01J50V
PKL2[P,Blank]-420L-U-40K-T2-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-PJ19F2
PKL2[P,Blank]-420L-U-50K-T5-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-PROXAH
PKL2[P,Blank]-130L-U-40K-T2-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-S4LWD8
PKL2[P,Blank]-130L-U-50K-T3-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-S56ERV
PKL2[P,Blank]-270L-U-50K-T2-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-SQX519
PKL2[P,Blank]-270L-U-50K-T4-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-T24DKU
PKL2[P,Blank]-270L-U-50K-T5-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-TYW7Z3
PKL2[P,Blank]-210L-U-40K-T4-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-U23GBJ
PKL2[P,Blank]-130L-U-40K-T3-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-UB7MNO
PKL2[P,Blank]-130L-U-50K-T5-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-VAS0UY
PKL2[P,Blank]-130L-U-50K-T4-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-XGQ2BF
PKL2[P,Blank]-420L-U-50K-T4-[C1,Blank]-[DB,WH,BL,SL]-[SF,TM,AM]	S-XS8DVA

PKL2

Parking Lot Area Light


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

EPA DETAILS




A-11.15" x B-23.92" x C-3.35"

PKL2-87L, PKL2-130L		GROSS WEIGHT		12 lbs	BOX DIMENSION		22.44" x 13.78" x 5.91"
CONFIGURATION							
EPA	0.64 ft²	1.28 ft²	1.03 ft²	1.66 ft²	1.55 ft²	2.06 ft²	
NET WEIGHT	9.9 lbs	19.8 lbs	19.8 lbs	29.7 lbs	29.7 lbs	39.6 lbs	



A-11.15" x B-23.4" x C-3.35"

PKL2-210L, PKL2-270L		GROSS WEIGHT		18 lbs	BOX DIMENSION		22.44" x 13.78" x 5.91"
CONFIGURATION							
EPA	0.65 ft²	1.30 ft²	1.04 ft²	1.69 ft²	1.56 ft²	2.08 ft²	
NET WEIGHT	16.6 lbs	33.2 lbs	33.2 lbs	49.8 lbs	49.8 lbs	66.4 lbs	



A-15.85" x B-25.35" x C-3.35"

PKL2-420L		GROSS WEIGHT		27 lbs	BOX DIMENSION		23.62" x 18.5" x 6.3"
CONFIGURATION							
EPA	0.68 ft²	1.36 ft²	1.09 ft²	1.77 ft²	1.64 ft²	2.18 ft²	
NET WEIGHT	25.4 lbs	50.8 lbs	50.8 lbs	76.2 lbs	76.2 lbs	101.6 lbs	