

# PARKING LOT LIGHT SERIES

## High Powered Parking Lot Light

Type:

Fixture:



### TECHNICAL DATA

PRODUCT	PKLH-568L
WATTAGE	400W
LUMENS	56800 LM
EFFICACY	142 LM/W
CCT	4000K*, 5000K
VOLTAGE	120 - 277V / 277V - 480V
DIMMING	1-10VDC
CRI	70
FINISH	DARK BRONZE, RAL COLOR CODE
LIGHTING ANGLE	TYPE III , IV*, V*
POWER FACTOR	0.9
LUMEN MAINTENANCE	L70 > 50,000 HRS
WORKING TEMP.	-22°F ~ 113°F

### DESCRIPTION

Our High Powered Parking Lot Light is wrapped in a die-cast aluminum to aid in better cooling. The optics has been greatly improved to help light utilization and evenness. In turn furthering luminous efficiency and a long work life.

### INTENDED USE

Our Parking Lot light series is widely used in different outdoor environments, and is suitable for wet locations. Our product is excellent for; museums, art galleries, underground parking lots, buildings, lawns, industrial areas, residential areas, sidewalks, schools & many more applications.



### ORDERING INFORMATION

Series	Lumen Package	Voltage	CCT	Optics	Control	Finish
PKLH - (High Powered Parking Lot Light)	568L - (56800 lm, 400W)	U - (120 - 277V) H - (277 - 480V)	40K - (4000K)* 50K - (5000K)	T3 - (Type III) T4 - (Type IV)* T5 - (Type V)*	C1 - (0-10V)* C2 - (BRI810-C-F) * C3 - (Remote) *	DB - (Dark Bronze) RAL - (Custom Color)*

\*Additional cost and/or lead time on customized fixtures may apply. Customized fixtures may not be returned.

# PARKING LOT LIGHT SERIES

## High Powered Parking Lot Light

Type:

Fixture:

**CONSTRUCTION**

Shell materials: aluminum & PC. Wrapped in die-cast aluminum.

**FINISH**

Dark bronze standard or RAL custom color code. Environment friendly polyester powder coating.

**OPTICS**

High precision molded proprietary polycarbonate lenses engineered for superior light distribution. Option of Type III, IV, V lenses available. (Lens III is standard)

**ELECTRICAL**


Class 2, constant current, 120V-277V/277-480V, 50-60 HZ, 0.95Amp@100V. 1-10V dimming circuit.

**LISTINGS**

UL certified.

\*\*IES files available upon request

**DIMENSIONS**

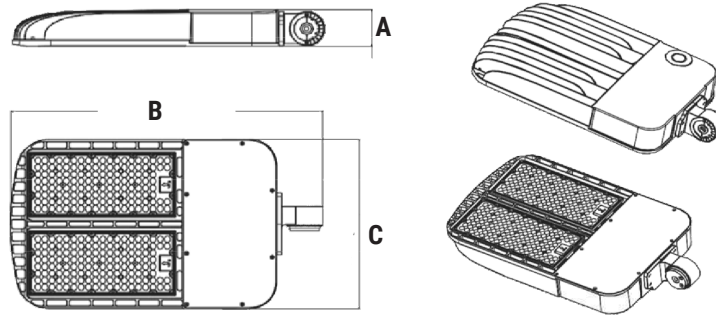

PRODUCT	A	B	C
<b>PKLH-568L</b>	<b>3.16 in</b> (80.2 mm)	<b>25.5 in</b> (647.7 mm)	<b>14.5 in</b> (368.3mm)

EPA 0.86  
Weight: 21.4 lbs

**ACCESSORIES**

\*Factory Installed



**BRI810-C-F** Sensor

\*Sold Separately



**RC-100**  
Remote Control



**BL-PKL-PHOTO-3P**  
Photocell Sensor  
120-277V



**BL-PKL-PHOTO-3P-480V**  
Photocell Sensor  
277-480V

**MOUNTING OPTIONS**

\*SOLD SEPARATELY




**PKL2-TA-SLP**  
Slip-Fitter



**PKL2-TB-S2P**  
Arm Mount



**PKL2-TC-TRN**  
Trunion



**PKL2-TB-ADPT**  
Pole Adapter