

SKY BRIDGE VERTICAL

Omnidirectional Vertical-lit Linear Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------


KEY FEATURES

- Vertical-lit LED engine provides direct and indirect uniformed illumination
- Available in 4 and 6ft and can be internally wired for continuous run up to 80ft
- Field changeable to 3000, 3500, and 4000K

TECHNICAL SUMMARY



SIZE:	4FT, 6FT
WATTAGE:	40W (4ft); 60W (6ft)
LUMEN / EFFICACY*	4FT: 4400LM, 6FT: 6600LM, 110LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT & CRI	30K/35K/40K changeable / CRI >80
CONTROL	0-10V dim to 10%
VALIDATIONS	cUL & UL damp location listed, FCC, RoHS compliant
LIFETIME	L90>50,000 hours, 5 year warranty
OPERATION TEMP.	-32°F ~ 104°F
FINISH	White, Black

*Delivered lumen may vary, refer to photometric for full performance data

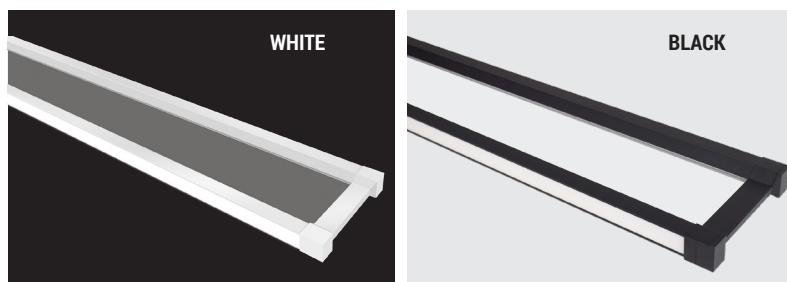


DIMENSIONS

4 FT
(8 lbs)

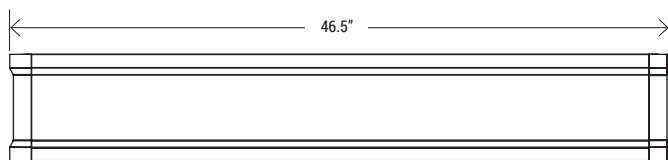

6 FT
(11 lbs)

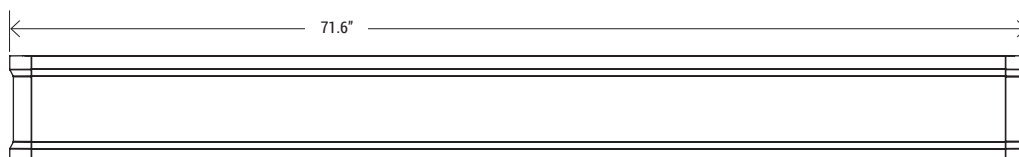

SKY BRIDGE VERTICAL


Omnidirectional Vertical-lit Linear Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------


ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series	Size	Lumen Package	Voltage	CCT	Control	Finish	Mounting			
SKV	4 - 4ft	40L - (4400LM/40W)	U - 120-277V	CC - 30K/35K/40K changeable	C1 - 0-10V dimming	WH - White BK - Black	P1R - dry wall or open ceiling pendant round set P2R - 15/16 & 9/16 flat drop ceiling round set P1S - dry wall or open ceiling pendant square set P2S - 15/16 & 9/16 flat drop ceiling square set			
	6 - 6ft	60L - (6600LM/60W)					<i>*P1R includes SKV-PMRC-WH/BK, aircraft cables and ac cable</i> <i>*P2R includes SKV-PMRC-WH/BK, SKV-DM16, SKV-DM95, aircraft cables and AC cable</i> <i>*P1S includes SKV-PMSC-WH/BK, aircraft cables and ac cable</i> <i>*P2S includes SKV-PMSC-WH/BK, SKV-DM16, SKV-DM95, aircraft cables and AC cable</i>			



Round Canopy Set



Square Canopy Set

*Accessories (Sold separately)

- SKV-CORD-12F-WH/BK** - White or Black adjustable 12' aircraft cable (2) and 12' 18/5 AC cord white hanging kit
- SKV-PMRC-WH/BK** - White or Black round shape canopy set (1 x power feed 4", 1 x non-power feed 2" canopy)
- SKV-PMSC-WH/BK** - White or Black square shape canopy set (1 x power feed 4", 1 x non-power feed 2" canopy)
- SKV-DM16** - 15/16 T-grid ceiling clips set
- SKV-DM95** - 9/16 T-grid ceiling clips set
- EM1** - 8W field install inverter

SPECIFICATIONS

CONSTRUCTION

Extruded aluminum housing with casting aluminum end-cap, housing can be field modified for continuous run.

FINISH

Polyester powder coated in white and black finish.

OPTICS/DIFFUSER

Injection molded vertical anidolic PMMA light guide panel provides wide and visual comfortable illumination.

MOUNTING

Pendant via 4ft adjustable aircraft cables and power cord set.

ELECTRICAL

30/35/40K field changeable LED engine with 100-277Vac constant current driver with 0-10V dimming. L90 > 50,000 hours.

VALIDATIONS

cUL & UL Damp location listed, FCC compliant, RoHS compliant