

STPH2

Selectable Strip Light

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Available in three lengths and apertures
- Three selectable color temperature
- Three selectable wattage levels

TECHNICAL SUMMARY

SIZE	2', 4', 8'
WATTAGE	2': 25W/20W/15W 4': 40W/30W/25W 8': 65W/60W/55W
LUMEN/EFFICACY	2': 3700LM/3000LM/2200LM; 150LM/W 4': 6100LM/4600LM/3800LM; 150LM/W 8': 9600LM/9100LM/8500LM; 150LM/W
INPUT VOLTAGE	120 - 277Vac, 120 - 347Vac
AVAILABLE CCT/CRI	35K/40K/50K Color Changeable; CRI+80
CONTROL	0-10V, BI-Level Microwave Sensor
VALIDATION	cUL & UL Damp Location Listed, DLC Listed, FCC, RoHS
LIFETIME/WARRANTY	5 YR Warranty / L70>50,000 HRS
OPERATION TEMP	-4°F ~ 122°F / 41°F ~ 122°F W/EM



STPH2-8



STPH2-4






STPH2-2

*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

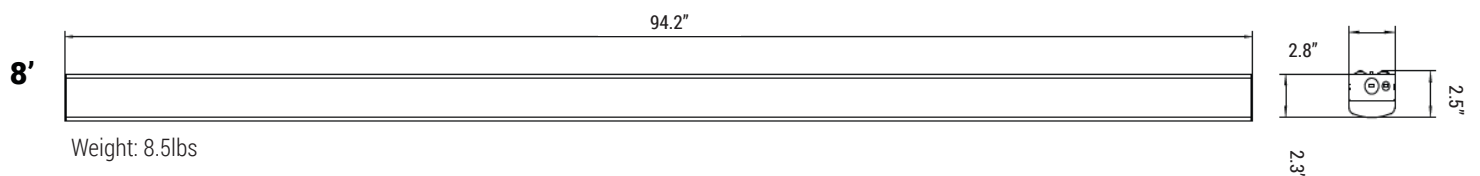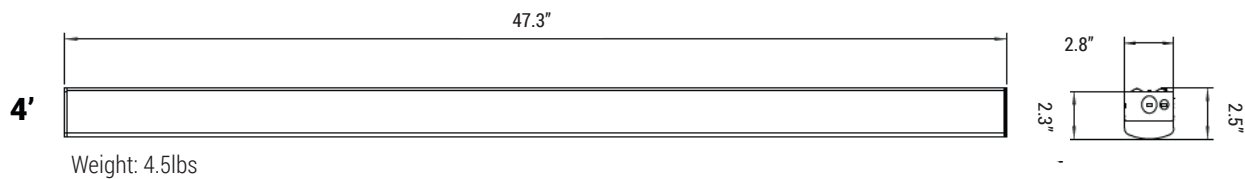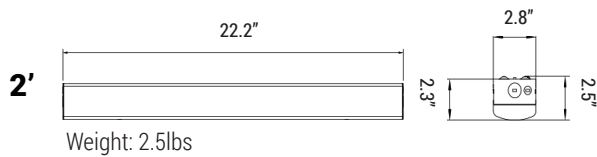

STPH2

Selectable Strip Light

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Series	Size	Lumen Package	Input Voltage	CCT	Control	EM Option*
STPH2- (Striplight Selectable)	2 - (2')	37LC - (3700LM/3000LM/2200LM)	U - (120V-277Vac) C - (120-347Vac)*	CC - (35K/40K/50K) CU - (custom single CCT)*	C1 - (On & Off 0-10V dimming) C3 - (Bi-level motion & daylight harvester sensor)	EM1 - (8W factory installed Integrated EM) EM15 - (15W Factory installed Integrated EM)
	4 - (4')	52LC - (6100LM/4600LM/3800LM)				
	8 - (8')	84LC - (9600LM/9100LM/8500LM)				


AVAILABLE ACCESSORIES




C3
ANT-3C
LOW VOLTAGE MICROWAVE
BI-LEVEL SENSOR



RC-100
REMOTE



STPH2-JOINER
CONTINUOUS RUN
CONNECTOR



STPH2-WIRE GUARD
WIRE GUARD
AVAILABLE FOR 4FT ONLY

*Accessories

ANT-3C - (Microwave Bi-Level Sensor)

RC-100 - (Remote)

STPH2-JOINER - (Strip Light Connection Piece)

STPH2-WIRE GUARD - (Wire guard for 4FT only)

*Available accessories sold separately

MOUNTING PARTS

INCLUDED



J-BOX COVER



V-HOOK



4' HANGING CABLE



SURFACE MOUNT KIT

SPECIFICATIONS

CONSTRUCTION

Compact-design channel and cover are formed with cold-rolled steel in white finish. Buckle design. Convenient disassembly and assembly.

FINISH

Lightweight steel body, high gloss, baked white finish. Durable end caps and polycarbonate diffuser.

OPTICS

Lens provides smooth, linear illumination.

ELECTRICAL

Universal voltage driver that accommodates input voltages from 120-277V AC at 50/60Hz with 0-10V dimming. Lumen maintenance is L70>50,000 hours.

VALIDATIONS

cUL & UL certified Damp Location. DLC Listed. RoHS. FCC. 5 year warranty. Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/qpl> to confirm qualification.

MOUNTING

Surface or hanging mount. See accessories section for detail.

DLC LISTED

SPITZER MODEL NO.	DLC PRODUCT ID
STPH2-2-37LC-U-CC	S-Y731J9
STPH2-4-52LC-U-CC	S-M0R7R3
STPH2-8-84LC-U-CC	S-YW3F7H

DEFAULT SETTING

Size	2FT	4FT	8FT
Default	20W & 4000K	30W & 4000K	60W & 4000K