

CYCLO

Architectural Round Cylinder

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Deep regressed cast design provides visual comfortable illumination
- Modular that offers various of optical, trim color and mounting options
- Available in 4, 6 and 8 inches aperture with field adjustable lumen output

TECHNICAL SUMMARY



SIZE:	4" / 6" / 8"
WATTAGE:	4"(25W/18W/12W), 6"(40W/30W/20W), 8" (58W/45W/30W)
LUMEN*	4" (2400LM / 1700LM / 1100LM) 6" (4300LM / 3200LM / 2100LM) 8" (5400LM / 4200LM / 2800LM)
EFFICACY	UP TO 107LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	2700K, 3000K, 3500K, 4000K / 80+CRI, 90+CRI
CONTROL	0-10V, custom
VALIDATIONS	UL & cUL damp location listed, FCC, RoHS
LIFETIME	L70>56,000 hours, 5 year warranty
OPERATION TEMP.	-4°F - 104°F / 32°F - 104°F (EM)
FINISH	Housing: white/black Trim: white/black/copper/chrome



*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

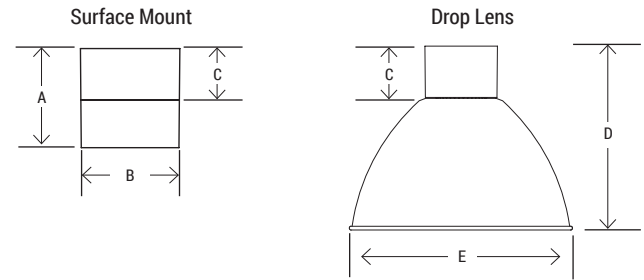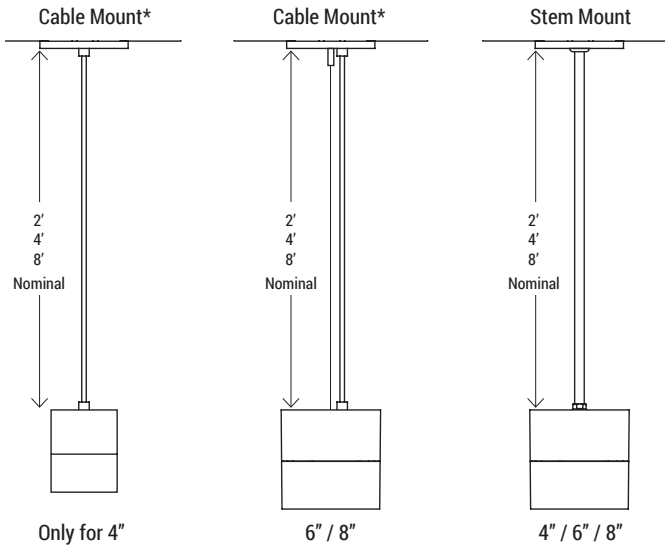

Model No.	A	B	C	D	E	WEIGHT
CCR-4	4.9"	3.9"	2.6"	10.1"	12.4"	2 lbs
CCR-6	5.9"	5.8"	3.05"	N/A	N/A	4 lbs
CCR-8	7.7"	7.8"	7.8"	N/A	N/A	9 lbs

*Cable Mounting: For 4", Power cable only. For 6" / 8", Power cable and Aircraft cable

CYCLO

Architectural Round Cylinder

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

*Additional cost and/or lead time on customized fixtures may apply.

ORDERING INFORMATION

***C2 option does not come with field changeable lumen output option, must select a factory pre-set lumen output.

***CCR 6 inch 2100 lumen is not available with C2 option.

Series	Size	Lumen Package	CRI	Voltage	CCT	Light Distribution	Control	Finish	Trim Finish	Mounting**
CCR	4 - (4")	24LC - (2400/1700/ 1100LM) changeable	Blank - (Standard 80) 9 - (90 CRI)*	U - (120-277V)	27K - (2700K) 30K - (3000K) 35K - (3500K) 40K - (4000K)	ND - (Narrow 24°) MD - (Medium 36°) WD - (Wide 60°)	C1 - (0-10V 10%) C2 - (0-10V 1%)*	W - (White) B - (Black) Custom Colors*	TW - (White) TB - (Black) TC - (Copper) TS - (Chrome) AW - (White Drop Lens) AB - (Black Drop Lense)	CR2 CR4 CR8 CS2 CS4 CS8 PR2 PR4 PR8 PS2 PS4 PS8 SR SS
	6 - (6")	43LC - (4300/3200/ 2100LM) changeable								
	8 - (8")	54LC - (5400/4200/ 2800LM) changeable								

TRIM FINISH:

White Housing



Black Housing



**Mounting

- CR2** - 2' Cable pendant mount for recessed J-box
- CR4** - 4' Cable pendant mount for recessed J-box
- CR8** - 8' Cable pendant mount for recessed J-box
- CS2** - 2' Cable pendant mount with surface conduit cutout
- CS4** - 4' Cable pendant mount with surface conduit cutout
- CS8** - 8' Cable pendant mount with surface conduit cutout
- PR2** - 2' Rigid Stem pendant mount for recessed J-box
- PR4** - 4' Rigid Stem pendant mount for recessed J-box
- PR8** - 8' Rigid Stem pendant mount for recessed J-box
- PS2** - 2' Rigid Stem pendant mount with surface conduit cutout
- PS4** - 4' Rigid Stem pendant mount with surface conduit cutout
- PS8** - 8' Rigid Stem pendant mount with surface conduit cutout
- SR** - Surface mount for recessed J-box
- SS** - Surface mount with surface conduit cutout

EM*

EM - 8W field installed remote emergency auto-dim inverter

SPECIFICATIONS

CONSTRUCTION

Constructed of rigid die cast aluminum.

FINISH

Housing is powder coating finish in white or black, trim finish are available in white, black, copper and chrome.

OPTICS/DIFFUSER

24°/36°/60° beam spread with multiple color trim options.

ELECTRICAL

Long-life high efficiency COB LED, 120-277Vac Class 2 driver with adjustable output lumen and standard 0-10V dimming.

MOUNTING

Pendant or surface mount with dedicated Cyclo mounting accessories, see mounting section for details.

VALIDATIONS

UL & cUL damp location listed, FCC, RoHS