


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Low-profile architectural semi-cut off regular and emergency illumination
- Cold-weather kit included for emergency illumination extreme cold environment
- 3 CCT field changeable with standard integrated photocontrol
- UL 924 listed, NFPA and ADA compliant with self-diagnostic function

TECHNICAL SUMMARY


WATTAGE:	up to 16W
LUMEN/EFFICACY	up to 1250LM @ 4000K / 100LM/W AC mode, 400LM @ 4000K emergency mode
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	30K/40K/50K CCT changeable / 80+ CRI
CONTROL	On/off photocell sensor
VALIDATIONS	UL wet location and UL 924 listed, IP65 rated, FCC, NFPA 70 and NFPA 101 requirement, ADA compliant, RoHS
LIFETIME	L70>60,000 hours, 3 year warranty
OPERATION TEMP.	-4°F ~ 104°F
FINISH	Dark Bronze, Black, White

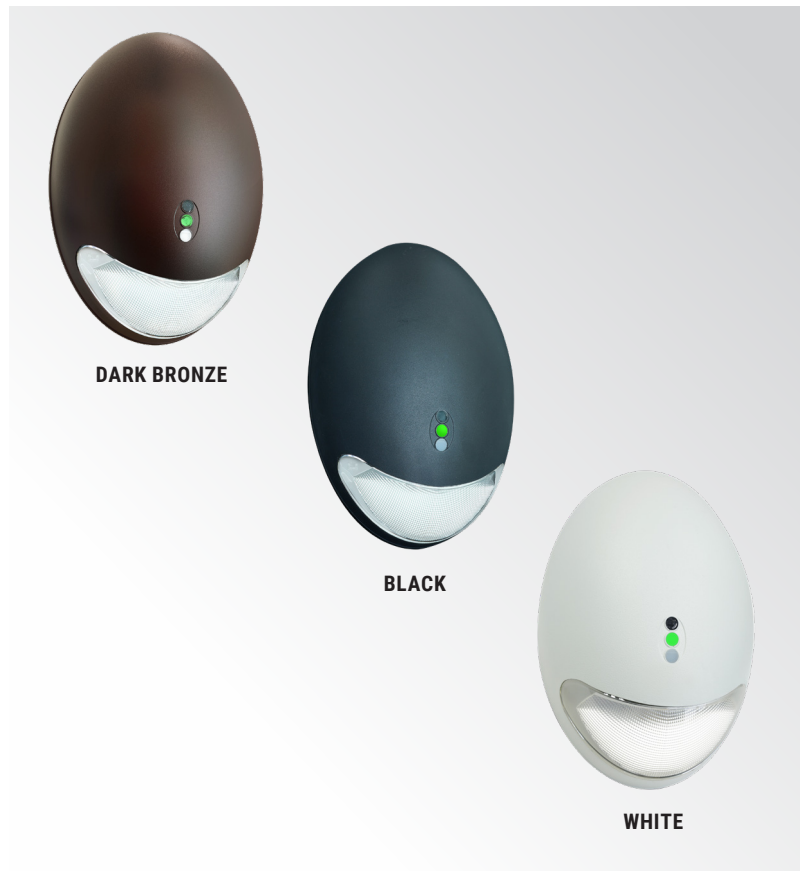

*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

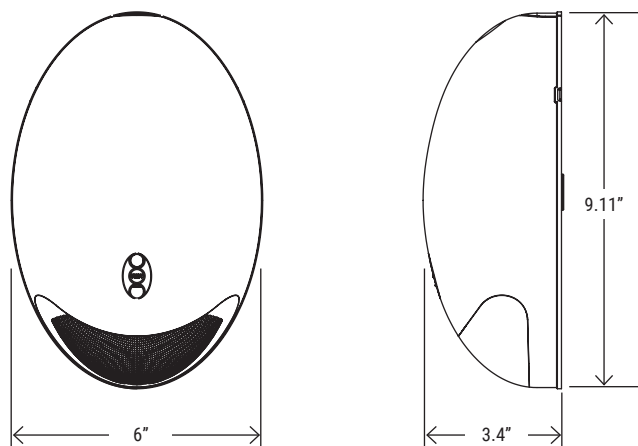

Weight: 15 lbs

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series	Lumen Package	Voltage	CCT	Control	Finish			
EWC	12L - (1250LM)	U - (120-277V)	CC - (30K/40K/50K changeable)	C1 - (On/off Photocell)	BK - (Black) DB - (Dark Bronze) WH - (White) *SL - (Silver) *Made to order			

SPECIFICATIONS

CONSTRUCTION

Cast aluminum main body with separable backplate for installation and maintenance.

FINISH

Exterior parts are protected by a rust and corrosion proof zinc-infused polyester powder coating.

OPTICS

UV resistant frosted polycarbonate lens.

ELECTRICAL

High-efficacy LEDs with minimum 80 CRI. 120-277Vac universal input with factory installed photocell. LiFeP04 battery provides minimum 90-minute emergency operation. LED indicator light & test button with self-diagnostics function. CCT changeable.

VALIDATIONS

UL wet location and UL 924 listed, IP65 rated, FCC, meets or exceeds NFPA 70 and NFPA 101 requirement, ADA compliant, RoHS

MOUNTING

Wall mount