

FACADE

Omni-directional Vertical-Lit Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Vertical-lit LED engine provides direct and indirect uniformed illumination
- Field changeable to 3000, 3500, and 4000K with standard 90CRI

TECHNICAL SUMMARY



SIZE:	2FT, 3FT, 4FT
WATTAGE:	20W (2ft); 40W/30W/20W (3ft and 4ft)
LUMEN / EFFICACY*	2500LM (2ft); 4000/3000/2000LM (3ft and 4ft), 90CRI
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT & CRI	30K/35K/40K changeable / CRI >90
CONTROL	0-10V dim 10%
VALIDATIONS	cUL & UL damp location listed, FCC, RoHS compliant
LIFETIME	L90>50,000 hours, 5 year warranty
OPERATION TEMP.	Regular (-4°F ~ 104°F) / EM (32°F ~ 104°F)
FINISH	White



*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

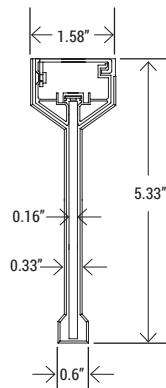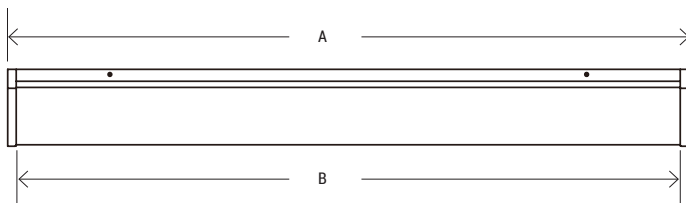

Model No.	A	B	WEIGHT
FAC-2-25L	23.64"	22.64"	3.31 lb
FAC-3-40LC	35.64"	34.28"	4.63 lb
FAC-4-40LC	47.28"	46.1"	5.95 lb

FACADE

Omni-directional Vertical-Lit Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.



Series	Size	Lumen Package	Voltage	CCT	Control	Mounting	Finish
FAC	2 - 2ft	25L - 2500LM (20W)	U - 120-277V	CC - 30K/35K/40K changeable	C1 - 0-10V dimming	P1R - Dry wall or open ceiling pendant round set P2R - 15/16 & 9/16 flat drop ceiling round set P3R - 9/16 slot drop ceiling round set	WH - White
	3 - 3ft	40LC - 4000LM/3000LM/2000LM (40W/30W/20W)					
	4 - 4ft	40LC - 4000LM/3000LM/2000LM (40W/30W/20W)					

***Accessories (Sold separately)**

- EM1** - 8W field install inverter
- FAC-CORD-12F-WH/BK** - Extended adjustable 12' aircraft cable (2) and 12' 18/5 AC cord white hanging kit

SPECIFICATIONS

CONSTRUCTION

Extruded aluminum housing with casting aluminum end-cap.

FINISH

Polyester powder coated in white, black finish

OPTICS/DIFFUSER

Injection molded vertical anidolic PMMA light guide panel provides wide and visual comfortable illumination.

MOUNTING

Suspended mount via adjustable aircraft cable and powder cord set 5ft standard, 12ft optional.

(This product is not able to do continuous runs)

ELECTRICAL

30/35/40K field changeable LED engine with 100-277Vac constant current driver with 0-10V dimming. L90 > 50,000 hours.

VALIDATIONS

cUL & UL damp location listed, FCC, RoHS compliant