

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Factory installed future proof sensor receptacle for plug and play Bi-level PIR occupancy sensor
- Factory installed emergency driver with integrated test switch on the flange
- Field changeable three lumen output and 35/40/50K CCT

TECHNICAL SUMMARY


SIZE:	1'x4', 2'x2', 2'x4'
WATTAGE:	28W/20W/17W/14W (1x4 and 2X2);41W/34W/28W/20W(2X4)
LUMEN*/EFFICACY	3800LM/2800LM/2400LM/2000LM (1X4) 3800LM/2800LM/2400LM/2000LM (2X2) 6400LM/5200LM/4600LM/3300LM (2X4) up to 133LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	30K/35K/40K/50K/65K changeable CRI >80
CONTROL	0-10V (10%), Optional plug and play Bi-level PIR occupancy sensor, Lutron Wireless control
VALIDATIONS	UL & cUL damp location listed, IC rated, FCC compliant, RoHS compliant, DLC Premium Listed
LIFETIME	L70>75,000 hours, 5 year warranty
OPERATION TEMP.	-4°F ~ 104°F (AC) / 30°F ~ 104°F (with EM)
FINISH	White

*Delivered lumen may vary, refer to photometric for full performance data



Quick and easy in-field installation of sensor

DIMENSIONS

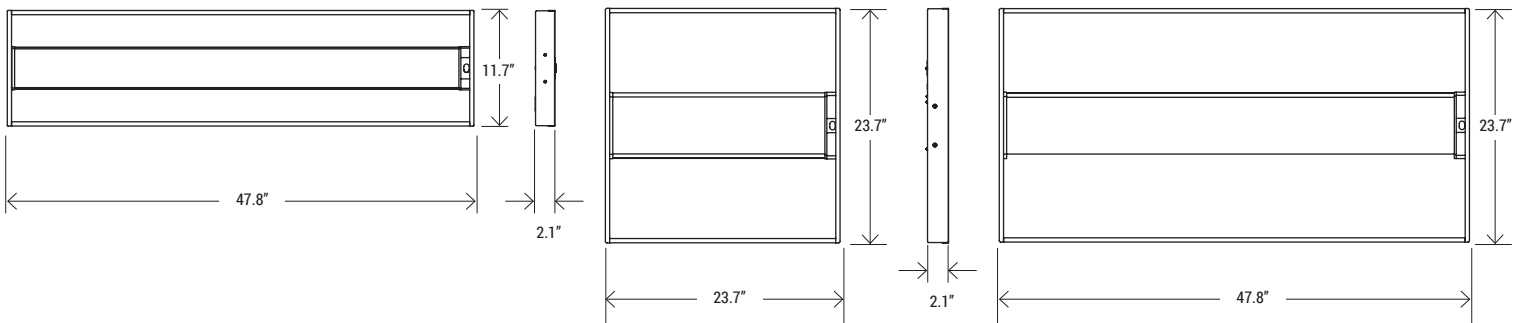

TT14
10 lbs
w/ EM: 12 lbs

TT22
8 lbs
w/ EM: 10 lbs

TT24
13 lbs
w/ EM: 15 lbs

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

-

-

-

-

-

Series	Size	Lumen Package	Input Voltage	CCT	Control	EM Option
TT	14 - (1'x4')	38LC - (3800/2800/2400/2000LM)	U - (120-277Vac)	5CC - (30/35/40/50/65K Color Changeable)	C1R - (0-10V 10% dimming with sensor receptacle) CA1 - (0-10V with Athena Wireless Node)* CMP - (0-10V Bi-Level PIR Occupancy Sensor)*	EM15 - (15W Factory Installed Integrated EM)*
	22 - (2'x2')	38LC - (3800/2800/2400/2000LM)				
	24 - (2'x4')	64LC - (6400/5200/4600/3300LM)				

*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)



BP-RMK-1x4
1x4 Drywall Recessed mount kit
BP-RMK-2x2
2x2 Drywall Recessed mount kit
BP-RMK-2x4
2x4 Drywall Recessed mount kit



TT-CMKW-1x4
1x4 Ceiling mount kit
TT-CMKW-2x2
2x2 Ceiling mount kit
TT-CMKW-2x4
2x4 Ceiling mount kit

*Accessories

RC-100 - CMP remote programmer
BP-RMK-1x4/BP-RMK-2x2/BP-RMK-2x4 - Recessed drywall mount kit
TT-CMKW-1x4/TT-CMKW-2x2/TT-CMKW-2x4 - Ceiling mount kit
MCF-185-6F - 6ft 5-core metal-clad flex whip
MCF-185-XF - Custom length 5-core metal-clad flex whip
MCF-186-6F - 6ft 6-core metal-clad flex whip
MCF-185-XF - Custom length 6-core metal-clad flex whip

*Available accessories sold separately

SPECIFICATIONS

CONSTRUCTION

Shallow 2.1" rugged cold-rolled steel frame with future proof sensor receptacle pre-embedded on flange.

FINISH

Powder coated in high gloss durable white finish.

OPTICS/DIFFUSER

Frosted PC lens

MOUNTING

Drop ceiling lay-in, Dry wall ceiling recessed via flange kit.

ELECTRICAL

30K/35K/40K/50K/65K field changeable CCT LED, 120-277Vac driver with adjustable output lumen and standard 0-10V dimmable with 12V auxiliary output for sensor.

VALIDATIONS

UL & cUL Listed for damp location, IC rated, FCC, RoHS compliant, DLC Premium listed
(Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/qpl> to confirm qualification.)



DLC Listed
Visit <https://www.designlights.org/qpl> to confirm qualification.)

SPITZER MODEL NUMBER	DLC PRODUCT ID
TT-22-LC-U-CC	S-MG1UCP
TT-24-LC-U-CC	S-L38PZ5

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------



Athena

An uncompromising solution. The Athena lighting control system empowers architects, lighting designers, electrical engineers, and facility managers with a native network of lighting, lighting controls, shades, and cloud-connected software that deliver exceptional experiences and building management.



A-WN-D01-RF-WH

Plenum rated and can be installed above the ceiling for wireless control of a fixture without any impact on fixture aesthetics.