

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES


- Architectural designed low profile housing with a wide illumination coverage
- Vandal resistant housing with cast captive end caps and tamper resistant fasteners
- ADA compliant, surface mount to wall or ceiling or stem pendant mount
- Available in 1, 2, 3, 4ft housing with multiple finish options

TECHNICAL SUMMARY


SIZE:	1 (12"), 2 (24"), 3 (36"), 4 (48")
WATTAGE:	20W, 30W, 50W, 60W, 75W, 95W
LUMEN/EFFICACY	1F: 1700/2400/2800LM, 2F: 3500/4500/6000LM, 3F: 3300/4400/5500/5800/7500/9400LM, 4F: 3600/4800/6000/8000/10,000LM
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	30/40/50K CCT changeable standard, 27K and 35K MTO available, Amber color 595nm long-wavelength MTO available, CRI>80
CONTROL	On/off with 0-10V driver, photocell control & bi-level PIR motion sensor control optional
VALIDATIONS	ETL & cETL Wet location listed, ADA compliant, IK10 impact rated, IP65 (1FT/2FT) and IP64 (3FT/4FT) rated, FCC, RoHS
LIFETIME	Projected L70 > 100,000 hours, 5 year warranty standard, 10 year limited warranty optional
SURGE PROTECTION	10Kv/5Ka
OPERATION TEMP.	-40°F ~ 122°F / 32°F ~ 122°F (with EM)
FINISH	Standard: Matte White, Matte Black, Dark Bronze, Silver Gray Premium: Pine Green, Corten Brown, Natatorium White Finish, Natatorium Black Finish



*Delivered lumen may vary, refer to photometric for full performance data

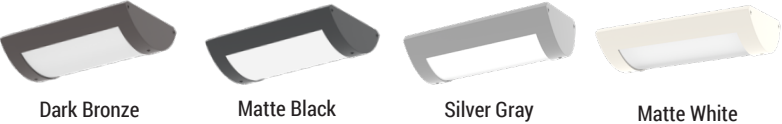

DIMENSIONS

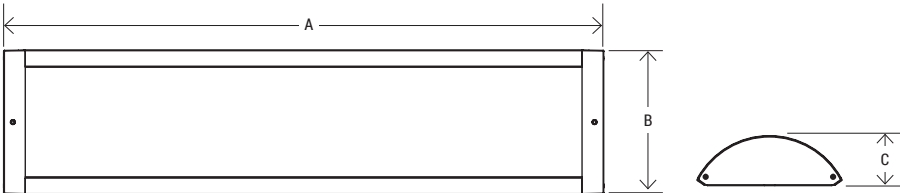

Model No.	A	B	C	WEIGHT (LBS)
DLFW1	12"	8.7"	3"	5
DLFW2	24"			8
DLFW3	36"			11
DLFW4	48"			14

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION


*Additional cost and/or lead time on customized fixtures may apply.

	-		-		-		-		-	
Series	Size	Lumen Package	Input Voltage	CCT	Lens & Diffuser Type	Control	Finish	Mounting	EM Option*	
DFLW	1 (1')	28LC - (2800/2400/1700LM)	U - (120-277Vac)	27K - (27K)* 35K - (35K)* CC - (30/40/50K Color Changeable)	FP - (Ribbed Frosted PC Lens)	C1 - (On/Off with 0-10V Driver No Dimming Wires) COP - (On/Off with Button Photocell)* CMP - (0-10V Bi-Level PIR Occupancy Sensor)*	BK - (Matte Black) DB - (Dark Bronze) SG - (Silver Gray) WH - (Matte White) PG - (Pine Green)* CB - (Corten Brown)* NW - (Natatorium White Finish)* NB - (Natatorium Black Finish)*	SW - (Surface mount back AC feed) SC - (Surface mount side AC feed)* SD - (Surface mount end-to-end side AC feed)* CR - (Corner mount kit back AC feed)* P1 - (1' Stem swivel pendant mount)* P2 - (2' Stem swivel pendant mount)* CC - (Corner mount single end conduit feed)*	EM1 - 8W factory installed integrated EM EM16 - 16W factory installed integrated EM (EM16 is for 4ft only)*	
	2 (2')	60LC - (6000/4500/3500LM)								
	3 (3')	55LC - (5500/4400/3300LM) 94LC - (9400/7500/5800 LM)								
	4 (4')	60LC - (6000/4800/3600LM) 100LC - (10000/8000/6000LM)								


FINISH REFERENCE

*Mounting option
P1, P2, SC, SD, CR, CC are assemble to order

STANDARD COLOR

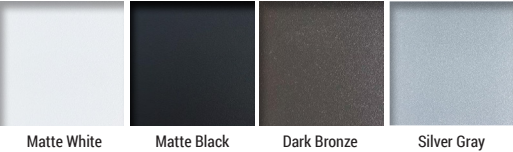

PREMIUM COLOR



Accessories*

DFLW-CPP - Pre-install 0-10V dimming wires

DFLW-ECA-XX - Standard default end cap

DFLW-ECC-XX - End cap for side power feed and CMP

DFLW-ECP-XX - End cap for continuous run

DFLW-QM-XX - Quick surface mounting plate kit, including drilling pattern

*Available accessories sold separately
(For replacement parts and accessories, see next page)

SPECIFICATIONS

CONSTRUCTION

Low copper extruded aluminum with die-cast aluminum end caps with removable door frame design for easy access for installation and maintenance.

FINISH

Finished with rust and corrosion proof polyester powder coating. Natatorium rated option available (surface mount & wall mount only).

OPTICS/DIFFUSER

IK10 impact rated UV stabilized diffused matte finish polycarbonate secured to fixture via integral concealed hinge and captive stainless steel TORX® head screws.

ELECTRICAL

Long life LED system, 30/40/50K CCT changeable with a Class 2, constant current 0-10V dimmable, 120V-277Vac, 50-60 HZ driver, factory installed integrated emergency driver optional.

MOUNTING

Surface mount to ceiling or wall and stem pendant mount.

VALIDATIONS

ETL & cETL Wet location listed, ADA compliant, IK10 impact rated, RoHS, IP65 rated for 1 & 2F when surface mount, IP64 rated for 3 & 4F when surface mount, Stem pendant mount is wet location rated only.

WARDEN

Vandal Resistant Wide Linear Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

REPLACEMENT PARTS/ACCESSORIES

Driver Kit

- DFLW-1-U-DR
- DFLW-2-U-DR
- DFLW-3-U-DR
- DFLW-4-U-DR

LED Engine

- DFLW-1-LED-CC
- DFLW-2-LED-CC
- DFLW-3-LED-CC
- DFLW-4-LED-CC

Warden Cover and Impact Proof Diffuser

- DFLW-1-FPC-XX (FINISH)
- DFLW-2-FPC-XX (FINISH)
- DFLW-3-FPC-XX (FINISH)
- DFLW-4-FPC-XX (FINISH)